



Hale Trailer Brake & Wheel

A005665-A005670

VIN: A1090-A1095



RENEGADE 18 (Model: RENLX4018F*829542)

Detailed Specifications		General	
SKU	RENLX4018F*829542		
Capacity	40 Tons Evenly Distributed - GAWR and GVWR Determine Legal Loads		
Length (Trailer Only)	48 feet 0 inches		
Width	8 feet 6 inches		
Compatibility	Designed to Accept Optional Third Flip Axle		
Accent Package	Stainless Steel Bumper Insert		
Weight	Est. Configured Weight: 16000# +/- 3%		
Gooseneck			
Gooseneck Design	Mechanical Removable with Fixed Guide Rollers - Combination Figure-8 Plate Which Provides 50 inches and 52 inches Loaded - Swing Radius of 81 inches		
Gooseneck Platform	Full-Width Gooseneck Platform with 1 1/8 inch Wood Floor		
Tool Box	None		
Gooseneck Fenders	Aluminum Fenders at Rear of Gooseneck		
VIN Plate	Bilingual VIN Plate		
Registration/Document Holder	Install Registration/Document Holder		
Deck			
Framework	All Main Longitudinal Members Fabricated with 100,000# Minimum Yield Steel Flanges with 50,000# Webs		
Deck Design	Flat Level Deck Design		
Deck Length	29 feet 0 inches Clear Deck Length		
Loaded Deck Height	18 inches with 6 inches Ground Clearance		
Crossmembers	On 12-inch Centers		
Flooring	1 3/8 inch Nominal Wood (Full Width)		
Recessed Floor Mounted D-Ring Package	None		
Front Ramps	None - Front of Deck Sloped Top Down to Assist in Loading with Traction Cleats		
Extension Brackets	Outriggers - 14 Pair - 28 Total Removable Swing Type, 1 Pair - 2 Total Removable Hook-On Type		
Rear Bridge: General			
Front Bogie Ramp	Sloped Steel Bogie Ramp (Full Width)		
Mini Boom Trough and Traction Cleats	None		
Deck to Bogie Connection	Fixed		
Covered Rear Bogie	Rear Bogie Platform with 1 1/8 inch Wood Floor		
Rear Bogie Height	40 inches		
Connections for Future Axle Attachment	Air and Electrical Connections to Go Along with Connecting Ears		
Rear Bridge: Axles			
Number of Axles	2		
Axle Capacity	25,000 lb. Nominal Capacity Per Axle - NOTE: GAWR Determined By Suspension Type, Brakes, Tires and Other Components		
Axle Spread	54.5 inches (Between Axles)		
Brakes	16.5 inches x 7 inches with 5.5 inches Autoslacks - Heavy Duty Brake Drums - Outboard Mount		
Spring Brakes	Spring Brakes (2 Axles)		
Dust Shield	None		
Hubodometer	None		
Rear Bridge: Suspension			
Suspension	Air Ride with Automatic Controls		
ABS	4S/2M System without Diagnostic Tool and Cable		
Ride Height Control	Automatic/Manual Raise/Lower Control		
Liquid Filled Gauge	Included		
Load Scale	None		



Detailed Specifications

Wheels and Tires

Wheels	8.25 x 22.5 LvL One Buffed Outside/Steel Inside - Hub-Piloted
Tires	255/70R 22.5 H Ply OEM Standard
Inflation	None

Lighting

Electrical System	DOT Sealed Beam and Harness with LED Lights and 4-inch Flush Mounted Battery Powered Amber Strobes
Tail Lights	3 Tail Light Package
Marker Lights	7 Marker Lights Per Side Including Mid-Turn
Electrical Receptacle	J560 7-Pin Connector

Paint

Paint	Fontaine Black Polyurethane Enamel
-------	------------------------------------

Miscellaneous

Lash Rings	9 Pair - 18 Total
Flag Holders	2 Pair Flag Holders

Additional Options

Flip Axle	None
Dust Shields on Flip Axle	None




RENEGADE 18



[RENEGADE 18 Base Model](#) (Note: Options not shown)

DISCLAIMER

Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical. Equipment availability, prices and specifications are subject to change without notice.

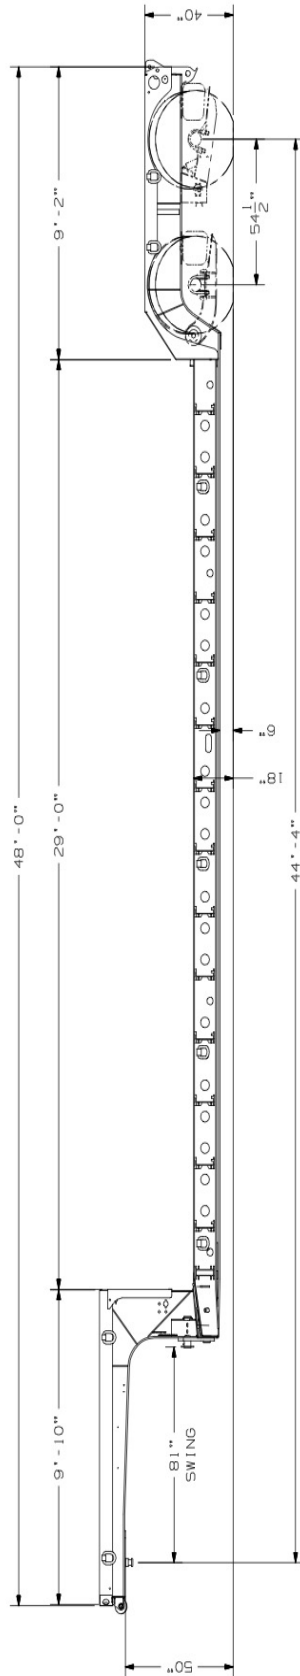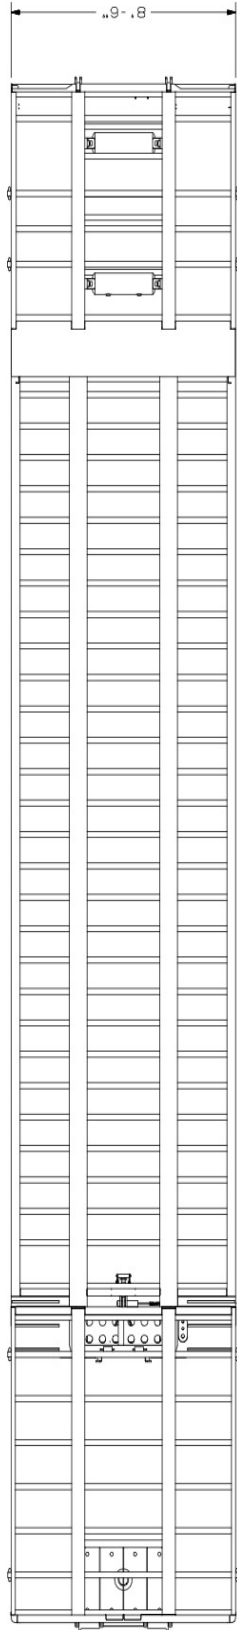

OPTIONAL FLIP AXLE



FONTAINE HEAVY-HAUL
SPRINGVILLE, AL
MODEL # **RENEGADE 18**
DRAWING NUMBER **6151**

THIS DRAWING IS THE PROPERTY OF FONTAINE HEAVY-HAUL. IT IS TO BE USED ONLY FOR THE PROJECT AND LOCATION SPECIFICALLY IDENTIFIED HEREON. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF FONTAINE HEAVY-HAUL.