

Hale Trailer Brake & Wheel A007313-A007322 VIN: 5A1524-5A1533



Detailed Specifications


Detailed Specifications		
MAGNITUDE 55MX (Model: MAG	55HMXTXT829543)	
	General	
SKU	MAG55HMXTXT829543	
Capacity	55 Tons in 16-foot (Closed Position) Length with 4 Axles Close Coupled Or Single Axle Stinger; GAWR and GVWR	
Capacity	Determine Legal Payloads	
Length (Trailer Only)	55 feet 4 inches	
Width	8 feet 6 inches	
Compatibility	Designed to Accept Optional 51/60 Rear Axle, EQ1 Spreader, and/or 23 inch Flip Box	
Accent Package	None	
Weight	Est. Configured Weight: 26900# +/- 3%	
Gooseneck		
Gooseneck Design	Narrow Hydraulic Removable Non-Ground Bearing - Swing Radius of 102 inches (11ft 11in overall Gooseneck Length) Set Up for Wetline Operation	
Loaded Fifth Wheel Height	50 inch Nominal Loaded Fifth Wheel Height With 5 Ride Height Positions	
Kingpin	Removable Kingpin at 102 inch Radius	
Power Source	Set Up for Wet Line Operation	
VIN Plate	Bilingual VIN Plate	
Registration/Document Holder	Install Registration/Document Holder	
Deck		
Framework	All Main Longitudinal Members Fabricated with 100,000# Minimum Yield Steel Flanges with 50,000# Webs	
Deck Design	Flat Level Telescopic Deck Design	
Deck Design Deck Length	29 feet 4 inches Clear Deck Length (Closed); 50 feet 4 inches (Open)	
	29 feet 4 inches Clear Deck Length (Closed); 50 feet 4 inches (Open) 20 inches with 6 inches Ground Clearance	
Loaded Deck Height		
Crossmembers	Crossmember Spacing Outboard Mainbeams 12 in c/c (Nominal)	
Flooring	2 inch Nominal Wood	
Front Ramps	None, Front of Deck Sloped Top Down to Assist in Loading with Traction Cleats	
Extension Brackets	14 pair - 28 Total Removable Swing Type, 2 Pair - 4 Total Heavy Duty Removable Hook-On Type	
Toolbox	1 Fully Covered Tray in Rear of Deck Between Mainbeams with Lockable Cover	
	Rear Bridge: General	
Front Bogie Ramp	Included	
Boom Trough	V Crossmembers with Bolt-In V Pan	
Deck to Bogie Connection	Modular	
Bolsters	Recessed Load Bearing Between All Axles and Rear of Last Axle	
Covered Rear Bogie	None	
Rear Bogie Height	40 7/8 inches to Top Flanges - 36 5/8 inches to Top of Bolsters	
	nent Air and Electrical Connections to Go Along with Connecting Ears	
Rear Bridge: Axles		
Number of Axles	3 Axles	
Axle Capacity	25,000 lb. Nominal Capacity Per Axle NOTE: GAWR Determined by Suspension Type, Brakes, Tires and Other Components.	
Axle Spread	54.5 inches (Between Axles)	
Brakes	16.5 inches x 7 inches with 5.5 inches Autoslacks - Heavy Duty Brake Drums - Outboard Mount	
Spring Brakes	None	
Dust Shield	None	
Hubodometer	None	
	Rear Bridge: Suspension	
Suspension	Air Ride	
ABS	None	
Third Lift Axle		
	Air Lift Installed on Third Axle	
Chain Lift	Chain Lift On First Axle	
Ride Height Control	5-Position Mechanical Ride Height Control System	
Manual Dump Valve	Manual Dump Valve (Push Pull)	
Liquid Filled Gauge	None	
Load Scale	None	
Wheels and Tires		
	Wheels and Tires	
Wheels	Wheels and Tires 8.25 x 22.5 LvL One Buffed Outside/Steel Inside - Hub-Piloted	
Wheels Tires		



Detailed Specifications

-	Lighting
Electrical System	DOT Sealed Beam and Harness with LED Lights and 4-inch Flush Mounted Battery Powered Amber Strobes
Tail Lights	3 Tail Light Package
Marker Lights	3 Marker Lights Per Side Including Mid-Turn
Electrical Receptacle	J560 7-Pin Connector
	Paint
Paint	Fontaine Black Polyurethane Enamel
	Miscellaneous
Lash Rings	12 Pair - 24 Total
Flag Holders	2 Pair Flag Holders
	Additional Options
Flip Box	None
Accent Package Installed on Flip Box	None
Spreader	None
Accent Package Installed on Rigid Spreader	None
Flip Axle	None
Dust Shields on Flip Axle	None
Accent Package Installed on Flip Axle	None
	Terms
Please Note	Price Includes Commodity Surcharges
Commercial Terms	Ex Works- Springville, AL, USA
	MAGNITUDE 55MX
3	MAGNITUDE 55MX Base Model (Note: Options not shown)



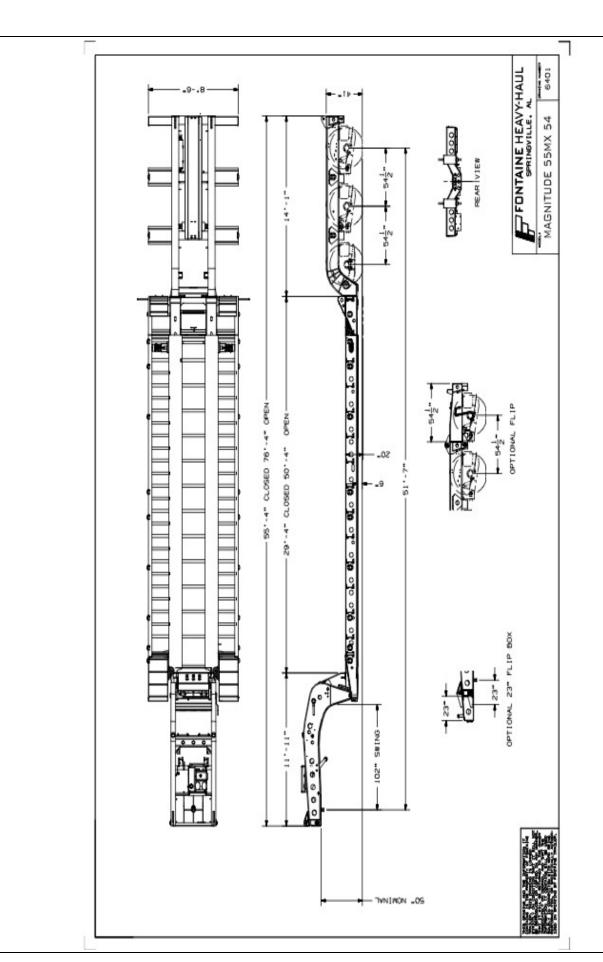



Sales Drawing: MAGNITUDE 55MX

