



# Hale Trailer Brake & Wheel

A008548-A008553

VIN: 5A1169-5A1174



## Detailed Specifications

**TRV4048HT (Model: THT4048F\*838493)**

### General

SKU	THT4048F*838493
Capacity	40 Tons Distributed Evenly, 25 Tons in 10-foot - GAWR and Tire Ratings Determine Legal Loads
Length	47 feet 11 inches
Width	102 inches
Weight	Est. Configured Weight: 17638# +/- 3%

### Gooseneck

Gooseneck Design	Fixed Full Width with Slope
Gooseneck Platform	Full-Width Gooseneck Platform with 1 3/8 inch Wood Floor
Front Gooseneck Ramp	Hydraulic Front Ramp with Traction Plate (8 feet 5 inches); 13 Degree Loading Angle
Loaded Fifth Wheel Height	49 inches
Swing Radius	85 inches
Power Source	Set Up for Wet Line Operation
Winch	18,000 lb. WARN Winch with Air Clutch, Located at Front of Gooseneck with 75 feet of Cable
Winch Guard	None
Radio Remote Control	4 Function (Winch, Main Tail, Flip Tail, Locks)
Controls	Dual Controls Located On Side of Gooseneck
Landing Gear	2 Speed OEM Standard with Roadside Crank Handle
Tool Box	Dual Toolboxes Located in Gooseneck
Chain Box	None
Electrical Receptacle	J560 7-Pin Connector

### Deck

Framework	All Main Longitudinal Members Fabricated with 100,000# Minimum Yield Steel Flanges with 50,000# Webs
Deck Length	38 feet 2 inches Clear Deck Length
Loaded Deck Height	35 inches
Crossmembers	18 inch Centers
Flooring	1 3/8 inch Nominal Wood (Full Width)
Tie Downs	Alternating Combo Stake Pockets/Chain Hook Slot and Double Keyhole Chain Slots on 18 inch Center. Four-Way Keyhole Slots Down the Center of the Trailer and Gooseneck ramp. Two way key hole slots on main tail
Deck to Bogie	Fixed

### Tail Section

Hydraulic Tail	Full Width Hydraulic Tail with Star Plate and Cleat Bars (11 Degree Loading Angle) with Amber Swing Out Lights
Main Tail Length	10 feet 5 inches
Flip Tail Length	4 feet 0 inches
Tail Height	Tail Raises to 72 inches
Tail Capacity	Tail Can Lift 25,000# Evenly Distributed

### Rear Bridge: Axles

Number of Axles	2
Axle Capacity	25,000 lb. Nominal Capacity Per Axle NOTE: GAWR Determined by Suspension Type, Brakes, Tires and Other Components.
Axle Spread	49 inches (Between Axles)
Brakes	12.25 inches x 7.5 inches with 6 inches Autoslacks - Heavy Duty Brake Drums - Outboard Mount
Spring Brakes	Spring Brakes (2 Axles)

### Rear Bridge: Suspension

Suspension	Air Ride with Automatic Height Controls
ABS	4S/2M System without Diagnostic Tool and Cable

## Detailed Specifications

### Wheels and Tires

Wheels	6.75 x 17.5 LxL One Buffed Outside/Steel Inside - Hub-Piloted
Tires	235/75R 17.5 Economical OEM Standard
Load Scale	Load Scale Installed
Hubodometer	None
Inflation	Tire Inflation System Installed

### Lighting

Electrical System	DOT Sealed Beam and Harness with LED Lights and 4-inch Flush Mounted Battery Powered Amber Strobes
Marker Lights	3 Marker Lights Per Side Including Mid-Turn
Bumper	DOT Compliant with 3 Lights Per Side and 3 Center Lights
Auxiliary Electrical Connection	4 Pin Socket on Curbside Rear of Deck
LED Work Lights	LED Work Lights on Gooseneck Drop


### Paint

Paint	Fontaine Black Polyurethane Enamel
Non-Skid Paint	Non Skid Paint on Outer Top Flanges
VIN Plate	Bilingual VIN Plate
Registration/Document Holder	Registration/Document Holder Mounted in Tool Box on Roadside

### Terms

Please Note	Price Includes Commodity Surcharges
Commercial Terms	Ex Works- Springville, AL, USA


### TRV4048HT

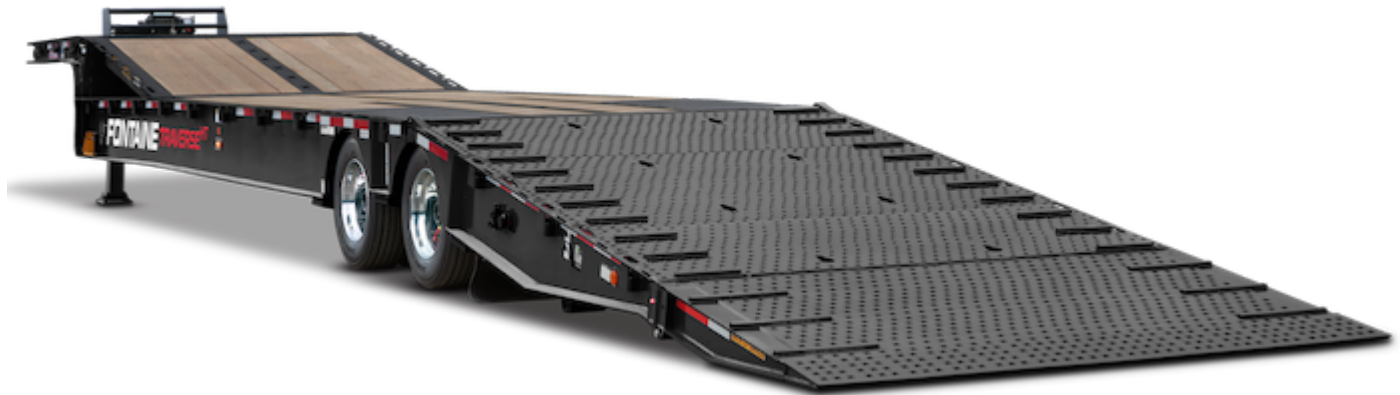

[TRV4048HT Base Model](#) (Note: Options not shown)

#### DISCLAIMER

Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical. Equipment availability, prices and specifications are subject to change without notice.

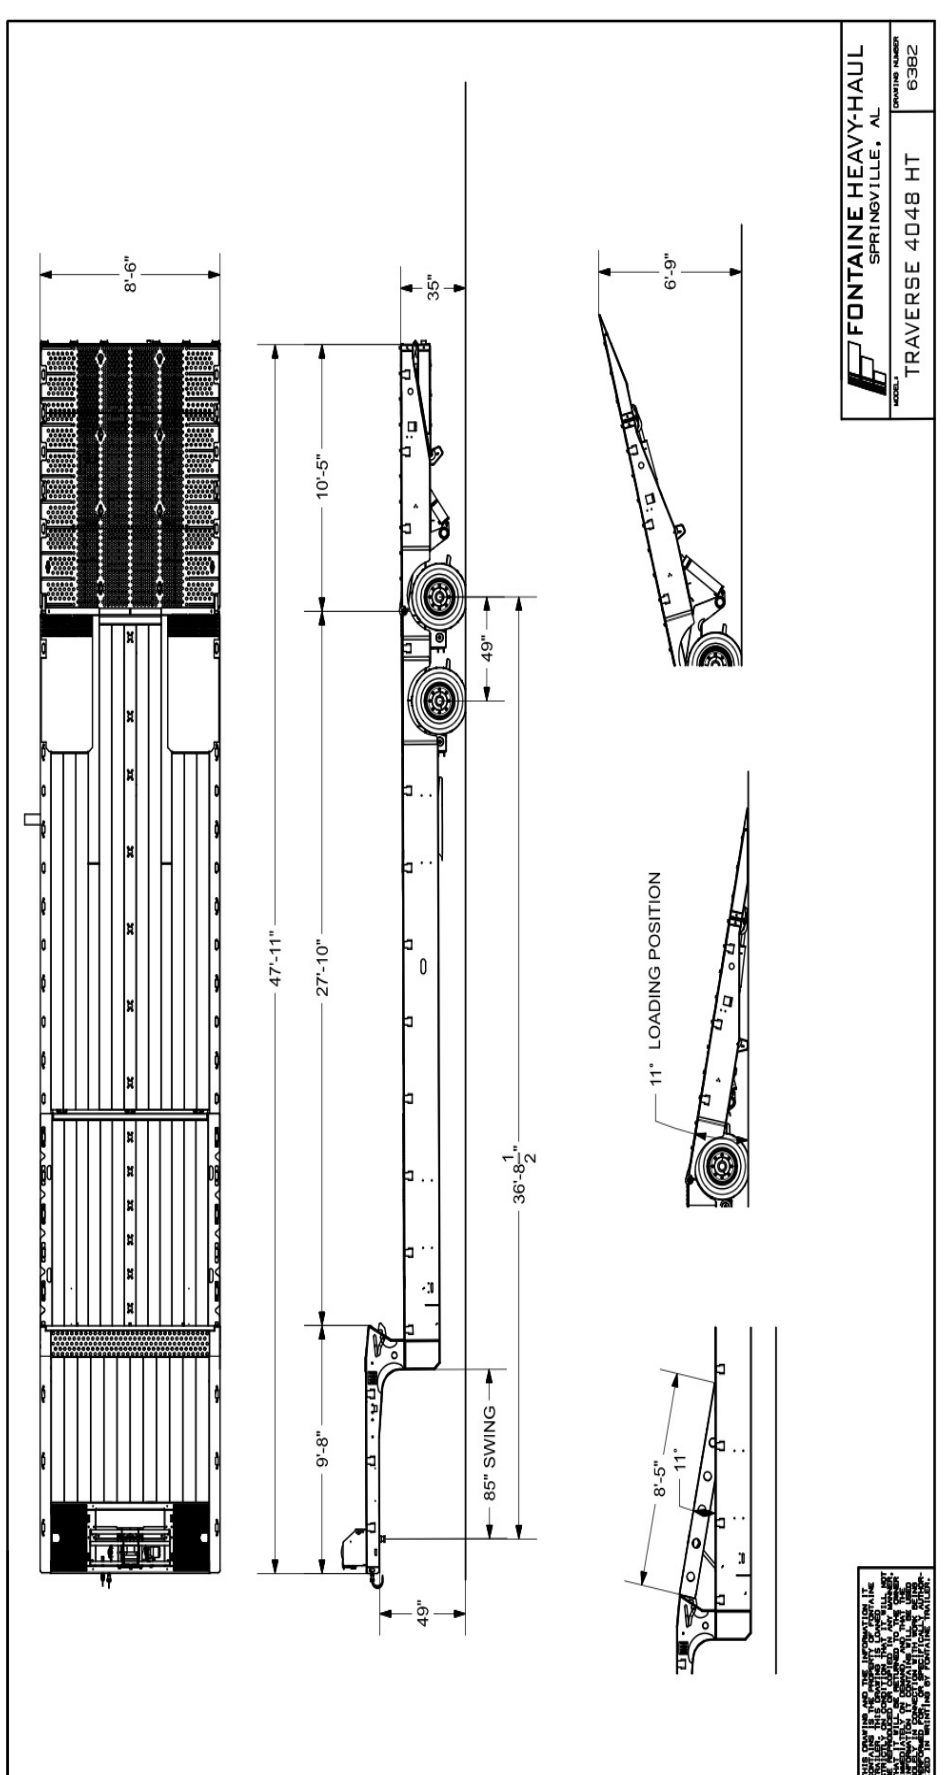

**FONTAINE HEAVY-HAUL**  
SPRINGVILLE, AL  
MODEL: TRAVERSE 4048 HT  
DRAWING NUMBER: 6362

