



# Hale Trailer Brake & Wheel

A011555-A011558  
VIN: 5A2594-5A2597



## Detailed Specifications

### RENEGADE XN20 (Model: RENLXT40NF\*829542)

General	
SKU	RENLXT40NF*829542
Capacity	40 Tons in 16-foot Length - GAWR and GVWR Determine Legal Loads
Length (Trailer Only)	50 feet 1 inch (closed); 71 feet 1 inch (open)
Width	8 feet 6 inches
Compatibility	Designed to Accept Optional Third Flip Axle
Accent Package	Stainless Steel Bumper Insert
Weight	Est. Configured Weight: 22350# +/- 3%
Gooseneck	
Gooseneck Design	Narrow Hydraulic Removable Non-Ground Bearing - Swing Radius of 102 inches (11 feet 11 inches overall Gooseneck Length) Set Up for Wetline Operation
Loaded Fifth Wheel Height	50-inch Nominal Loaded Fifth Wheel Height with 5 Ride Height Positions
Power Source	Set Up for Wet Line Operation
VIN Plate	Bilingual VIN Plate
Registration/Document Holder	Install Registration/Document Holder
Deck	
Framework	All Main Longitudinal Members Fabricated with 100,000# Minimum Yield Steel Flanges with 50,000# Webs
Deck Design	Flat Level Deck Design
Deck Length	29 feet 0 inches Clear Deck Length (closed) - 50 feet 0 inches (open)
Loaded Deck Height	20 inches with 6 inches Ground Clearance
Crossmembers	On 24 inch Centers
Deck Lock	First 5 Spaced Approx. 12 inches; Others Every 50 inches
Flooring	1 3/8 inch Nominal Wood (Full Width)
Recessed Floor Mounted D-Ring Package	None
Front Ramps	None - Front of Deck Sloped Top Down to Assist in Loading with Traction Cleats
Extension Brackets	Outriggers - 14 Pair - 28 Total Removable Swing Type, 1 Pair - 2 Total Removable Hook-On Type
Rear Bridge: General	
Front Bogie Ramp	Sloped Steel Bogie Ramp (Full Width)
Mini Boom Trough and Traction Cleats	None
Deck to Bogie Connection	Fixed
Covered Rear Bogie	Rear Bogie Platform with 1 1/8 inch Wood Floor
Rear Bogie Height	41 inches
Connections for Future Axle Attachment	Air and Electrical Connections to Go Along with Connecting Ears
Rear Bridge: Axles	
Number of Axles	2
Axle Capacity	25,000 lb. Nominal Capacity Per Axle - NOTE: GAWR Determined By Suspension Type, Brakes, Tires and Other Components
Axle Spread	54.5 inches (Between Axles)
Spring Brakes	Spring Brakes (2 Axles)
Dust Shield	None
Hubodometer	None
Rear Bridge: Suspension	
Suspension	Air Ride with Automatic Controls
ABS	4S/2M System without Diagnostic Tool and Cable
Ride Height Control	Automatic/Manual Raise/Lower Control
Liquid Filled Gauge	Included
Load Scale	None

## Detailed Specifications

Wheels and Tires	
Wheels	8.25 x 22.5 LVL One Buffed Outside/Steel Inside - Hub-Piloted
Tires	255/70R 22.5 H Ply OEM Standard
Inflation	None
Lighting	
Electrical System	DOT Sealed Beam and Harness with LED Lights and 4-inch Flush Mounted Battery Powered Amber Strobes
Tail Lights	3 Tail Light Package
Marker Lights	7 Marker Lights Per Side Including Mid-Turn
Special	Not Available on This Model
Electrical Receptacle	J560 7-Pin Connector
Paint	
Paint	Fontaine Black Polyurethane Enamel
Miscellaneous	
Lash Rings	12 Pair - 24 Total
Flag Holders	2 Pair Flag Holders
Additional Options	
Flip Axle	None
Dust Shields on Flip Axle	None




## RENEGADE XN20




[RENEGADE XN20 Base Model](#) (Note: Options not shown)

### DISCLAIMER

Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical. Equipment availability, prices and specifications are subject to change without notice.

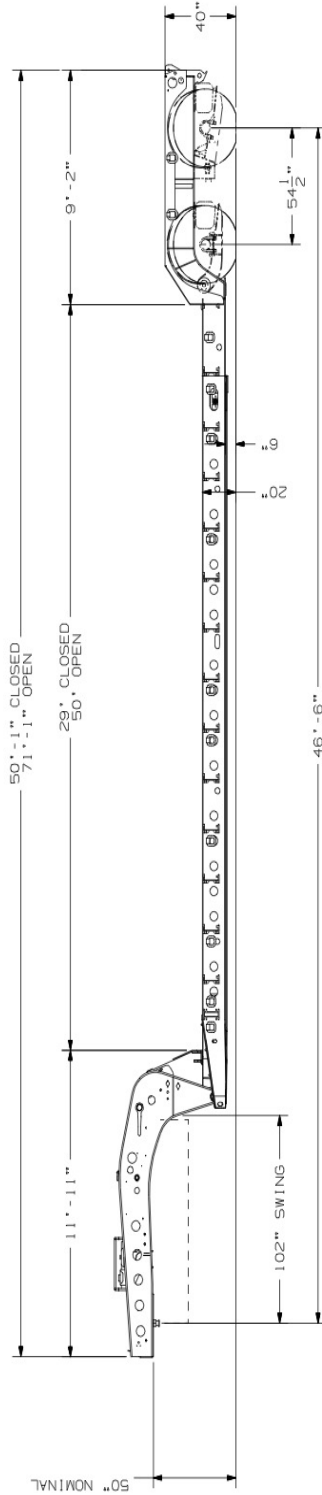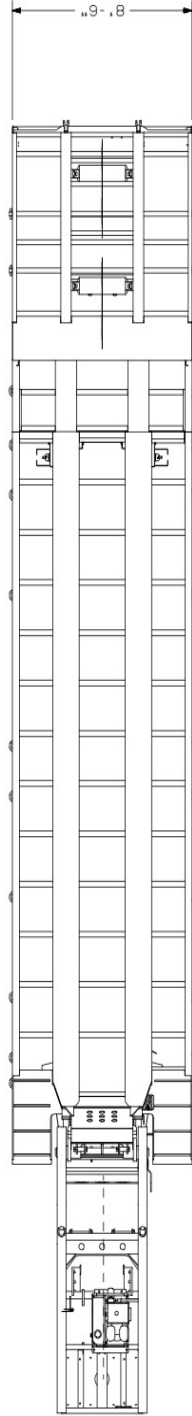

REAR VIEW



OPTIONAL FLIP AXLE

<b>FONTAINE HEAVY-HAUL</b>	
SPRINGVILLE, AL	
MODEL	RENEGADE XN20 29
DRAWING NUMBER	6378

THIS DRAWING IS THE PROPERTY OF FONTAINE HEAVY-HAUL. IT IS TO BE USED FOR THE DESIGN AND CONSTRUCTION OF THE TRAILER ONLY. IT IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF FONTAINE HEAVY-HAUL. FONTAINE HEAVY-HAUL IS NOT RESPONSIBLE FOR ANY DAMAGE TO THE TRAILER OR TO THE TRAILER'S PERFORMANCE. FONTAINE HEAVY-HAUL IS NOT RESPONSIBLE FOR ANY DAMAGE TO THE TRAILER OR TO THE TRAILER'S PERFORMANCE. FONTAINE HEAVY-HAUL IS NOT RESPONSIBLE FOR ANY DAMAGE TO THE TRAILER OR TO THE TRAILER'S PERFORMANCE.