

HALE

TRAILER

BRAKE & WHEEL



A015515-A015524
VIN: 568684-568693

SALES | RENTALS | PARTS | SERVICE

Allentown, PA:	800-383-8894	Jacksonville, FL:	800-828-3055
Baltimore, MD:	888-601-7500	Little Rock, AR:	833-424-8944
Boston, MA:	800-854-5310	Portland, ME:	800-325-4253
Concord, NC:	800-438-2250	Richmond, VA:	866-839-3495
Delmar, DE:	866-486-1400	Scranton, PA:	800-569-1400
Des Moines, IA:	888-673-5011	Springfield, MA:	800-854-5306
Elkton, MD:	800-544-7127	Voorhees, NJ:	866-315-0235

HaleTrailer.com | @haletrailer



800-232-6535 *FINANCING AVAILABLE

Velocity Drop Deck 48' Closed Air (Model: HAVSD12CTA)

Length / Width: 48 feet x 102 inches
Suspension Type: Air tandem
Deck Lengths: 10 feet front and 38 feet rear
Frame Rating: 80,000 lbs distributed - GAWR and tire ratings determine legal payloads
Rear Deck Height: 40 inches - loaded
Flooring: 1 1/8 inch wood
Crossmembers: 18 inch centers front deck / 12 inch centers rear deck - 4 inch jr. I-steel
Side Rails: 6 inch structural channel @ 6.5 lbs/ft
Stake Pockets: 3/16 inch steel on 24 inch centers
Pipe Spools: Double between stake pockets
Rubrail: 3/8 inch x 2 1/2 inch steel
Main Beams: 130K load bearing flanges
Kingpin: 18 inches
Loaded Fifth Wheel Height: 49 inches
Landing Gear: OEM standard
Knee Braces: Fabricated on approx. 60 inch C/C
Bulkheads: Removable steel 4 post DOT type bulkhead - no turnback - 48 inches high
Bulkhead Pockets: 4 - F-5 DOT-type steel
Number of Axles: 2
Axle Spindle: Tapered
Brakes: Spring brakes, auto slacks
Air Line Filters: (2) Meritor In-line type installed
ABS: 4S/2M - no cable or tool
Axle Spread: 49 inches - set at rear
Hub and Drums: 10-hole hub-piloted with outboard cast drums
Wheel Ends: Grease in hubs - *** 5-year wheel end warranty ***
Wheels: 22.5 x 8.25 steel disc wheels - pre-painted white - STANDARD
Tires: 255/70R 22.5 16PR OEM standard
Tire Inflation System: None standard
Suspension Detail: AANL23K Intraax air ride
Auto Glad Hand Dump: Installed
Front Corners: Tapered
Electrical System: LED: 3 lights/side, 2 lights/side on rear- STANDARD
Paint: Black urethane with Velocity decals - STANDARD
Conspicuity Tape: Per NHTSA specs - installed on rubrails
Bumper: Weld-on type - meets underride requirements
Mudflaps: 1 set OEM standard
Winch Track: Steel on road side: 8-foot front deck and full length on rear deck where possible
Sliding Winches: 12 standard: 2 front deck and 10 rear deck
27 foot Winch Straps: None standard
30 foot Winch Straps: None standard
Dock Bumpers: 1 pair rubber on rear
Spare Tire Carrier: 1 standard - mounted between lower gooseneck beams
Hubodometer: None standard
Registration Holder: Install registration holder - OEM standard
Tool Box: None standard
VIN Plate: Bilingual US/Canadian VIN plate

DISCLAIMER


Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical. Equipment availability, prices and specifications are subject to change without notice.

THIS DOCUMENT REMAINS PROPERTY OF FONTAINE TRAILER COMPANY. ITS CONTENTS ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE, USE OR DISCLOSE ANY INFORMATION WITHOUT WRITTEN CONSENT FROM FONTAINE TRAILER COMPANY.

NOTE:
FRAME RATINGS DENOTE WHAT THE TRAILER FRAME IS CAPABLE OF SUPPORTING. THE SUSPENSION/TIRES MAY NOT BE CAPABLE OF SUPPORTING THESE LOADS WHEN CONCENTRATED OVER THE SUSPENSION AREA. REFER TO THE TRAILER GVWR AND GAWR.

FRAME RATINGS

DISTRIBUTED	80,000
COIL	48,258
60"	51,261
120"	54,724
180"	58,688

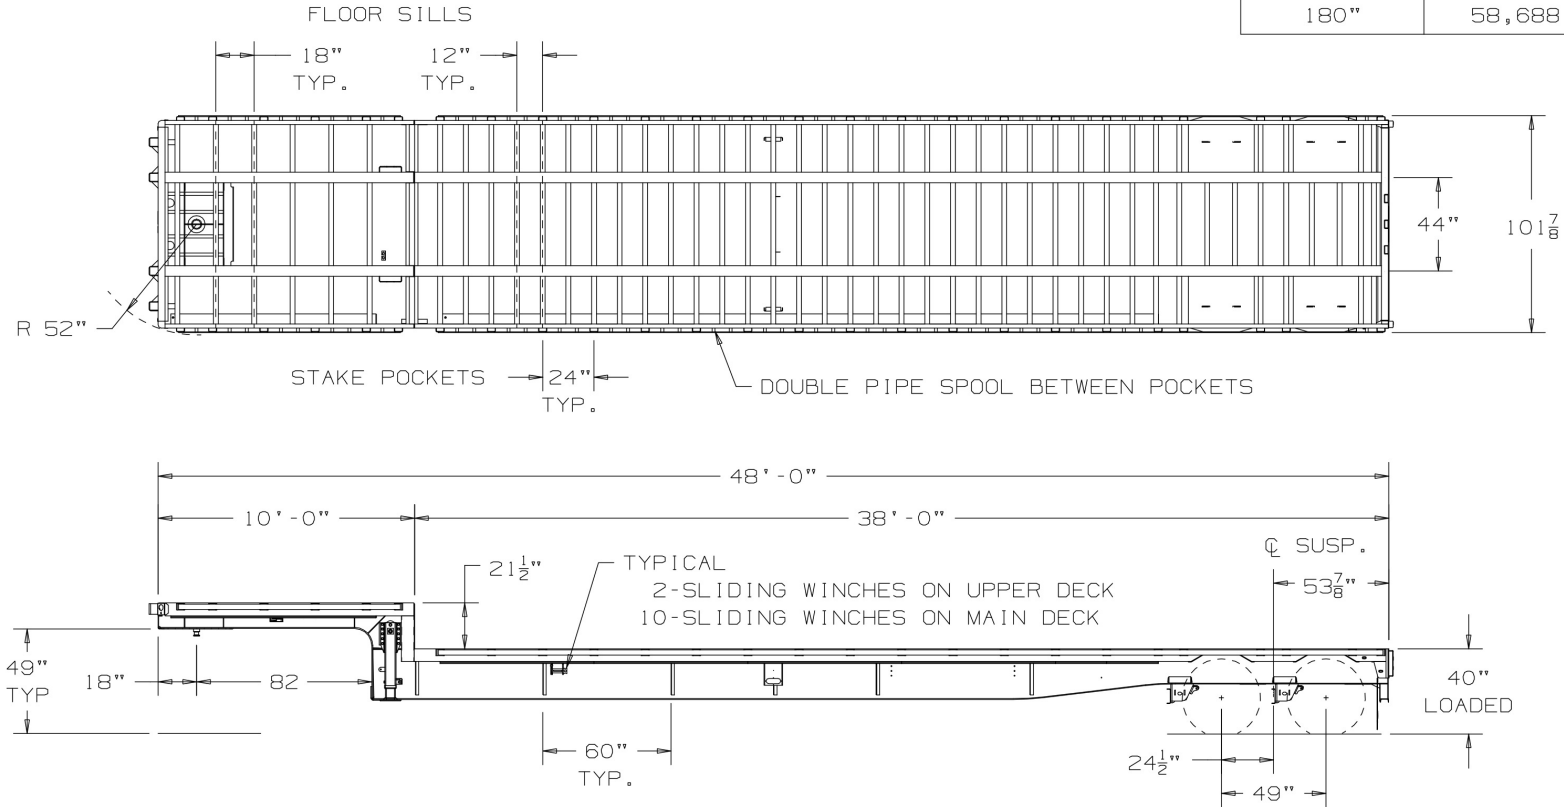

KING PIN HEIGHT RANGE

47"
48"
49" (TYPICAL)
50"

DO NOT SCALE DRAWING
DIMENSIONS ADHERE TO: ASME Y14.5M-1994
THIRD ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS: $\pm \frac{1}{16}$
DECIMALS: $\pm .06$
HOLES: $\pm .005$
ANGLES: $\pm 2^\circ$
UNITS OF DIMENSION ARE: INCHES

DRAWN BY KT
CHECKED BY
APPROVED BY

DATE 1/6/12
DATE
DATE

	FONTAINE TRAILER CO. HALEYVILLE, AL
TITLE:	HAVSD12CTA

PRINTED OR COPIED DOCUMENT IS UNCONTROLLED DOCUMENT UNLESS STAMPED ORIGINAL		
SIZE: A	SCALE: ***	SHEET: 1 OF 1
DRAWING NUMBER 18361		REV. P