

# HALE TRAILER BRAKE & WHEEL



A022074-A022094  
VIN: 75336-75356

## SALES | RENTALS | PARTS | SERVICE

Allentown, PA:	800-383-8894	Jacksonville, FL:	800-828-3055
Baltimore, MD:	888-601-7500	Little Rock, AR:	833-424-8944
Boston, MA:	800-854-5310	Portland, ME:	800-325-4253
Concord, NC:	800-438-2250	Richmond, VA:	866-839-3495
Delmar, DE:	866-486-1400	Scranton, PA:	800-569-1400
Des Moines, IA:	888-673-5011	Springfield, MA:	800-854-5306
Elkton, MD:	800-544-7127	Voorhees, NJ:	866-315-0235

HaleTrailer.com | @haletrailer   
**800-232-6535** \*FINANCING AVAILABLE

## Infinity Flat 48' Wide Spread Air (Model: HAICF12WSA)

<b>Length / Width:</b> 48 feet x 102 inches
<b>Suspension Type:</b> Wide spread air
<b>Frame Rating:</b> 80,000 lbs distributed - 55,000 lbs concentrated in 4 feet- GAWR and tire ratings determine legal payloads
<b>Flooring:</b> 1 1/8 inch aluminum with 4 wood nailer strips
<b>Crossmembers:</b> 12 inch centers - 4 inch jr. I-steel
<b>Single Coil Hauling Package:</b> Included
<b>Side Rails:</b> Exclusive <b>Revolutionary RASR Rail Technology</b> -- one piece routed aluminum designed for strength and impact
<b>Chain Cargo Tie Downs:</b> 15 pair recessed in siderails
<b>Stake Pockets:</b> Routed aluminum on 24 inch centers (2 load securement openings between stake pockets)
<b>Rubrail:</b> Integrated with siderail
<b>Main Beams:</b> 130K load bearing flanges
<b>Kingpin:</b> 30 inches
<b>Loaded Fifth Wheel Height:</b> 49 inches
<b>Landing Gear:</b> OEM Standard with Forward & Rear Bracing
<b>Knee Braces:</b> Fabricated on approx. 60 inch C/C
<b>Bulkhead Pockets:</b> 4 DOT type bulkhead pockets only - welded to front
<b>Bulkheads:</b> None standard
<b>Number of Axles:</b> 2
<b>Axle Spindle:</b> Tapered
<b>Brakes:</b> Spring brakes, auto slacks
<b>Air Line Filters:</b> (2) Meritor In-line type installed
<b>ABS:</b> 4S/2M - no cable or tool
<b>Axle Spread:</b> 122 inches - set at rear
<b>Hub and Drums:</b> 10-hole hub-piloted with outboard cast drums
<b>Wheel Ends:</b> Grease in hubs - *** 5-year wheel end warranty ***
<b>Wheels:</b> 22.5 x 8.25 (4) Outer Aluminum Lvl One Buffed, (4) Inner steel disc wheels - pre-painted white
<b>Tires:</b> 11R 22.5 14PR OEM standard tires
<b>Tire Inflation System:</b> None standard
<b>Suspension Detail:</b> Hendrickson AANT23K Intraax air ride
<b>Auto Glad Hand Dump:</b> Installed
<b>Electric Dump Valve:</b> Wired to 7-way auxiliary socket to dump rear axle
<b>Air Lift:</b> None standard
<b>Front Corners:</b> Tapered steel
<b>Electrical System:</b> LED: 3 lights/side, 3 lights/side on rear
<b>Paint:</b> Black urethane on steel parts with Infinity decals - STANDARD
<b>Conspicuity Tape:</b> Per NHTSA specs - installed in recess on rubrails
<b>Bumper:</b> Weld-on type - meets underride requirements - painted steel
<b>Mudflaps:</b> 2 sets OEM standard; Spring loaded brackets behind front axle
<b>Spare Tire Carrier:</b> Spare tire carrier - bolted on curbside
<b>Winch Track:</b> Full length integrated double L type aluminum on both sides -- STANDARD
<b>Sliding Winches:</b> (14) With Zinc Finish: 7 Each Side with Rope Hook/Winch Strap Hook Retainers
<b>27 foot Winch Straps:</b> None standard
<b>30 foot Winch Straps:</b> None standard
<b>Dock Bumpers:</b> 1 pair rubber on rear
<b>Hubodometer:</b> None standard
<b>Registration Holder:</b> Install registration holder - OEM standard
<b>Tool Box:</b> None standard
<b>VIN Plate:</b> Bilingual US/Canadian VIN plate

### DISCLAIMER


Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical. Equipment availability, prices and specifications are subject to change without notice.

THIS DOCUMENT REMAINS PROPERTY OF FONTAINE TRAILER COMPANY. ITS CONTENTS ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE, USE OR DISCLOSE ANY INFORMATION WITHOUT WRITTEN CONSENT FROM FONTAINE TRAILER COMPANY.

SUSPENSION TABLE				
SUSPENSION	TIRE SIZE	REAR DECK HT. LIGHT LOADED	SUSP. REAR SETTING	KING PIN TO REAR AXLE
HUTCH, H9700 on H-900-38 SLIDE BOX, 3-LEAF SPRINGS H356-00, DWG# 03706072	295/75R 22.5, 14-PLY	57"	55 $\frac{1}{2}$ "	37'-6" FRONT SETTING
	11R 24.5 14-PLY	58 $\frac{1}{2}$ "	56 $\frac{1}{2}$ "	42'-6" REAR SETTING

FRAME RATINGS	
DISTRIBUTED	80,000
COIL	46,400
60"	49,405
120"	52,885
180"	56,900

NOTE:  
 FRAME RATINGS DENOTE WHAT THE TRAILER FRAME IS CAPABLE OF SUPPORTING. THE SUSPENSION/TIRES MAY NOT BE CAPABLE OF SUPPORTING THESE LOADS WHEN CONCENTRATED OVER THE SUSPENSION AREA. REFER TO THE TRAILER GWR AND GAWR.

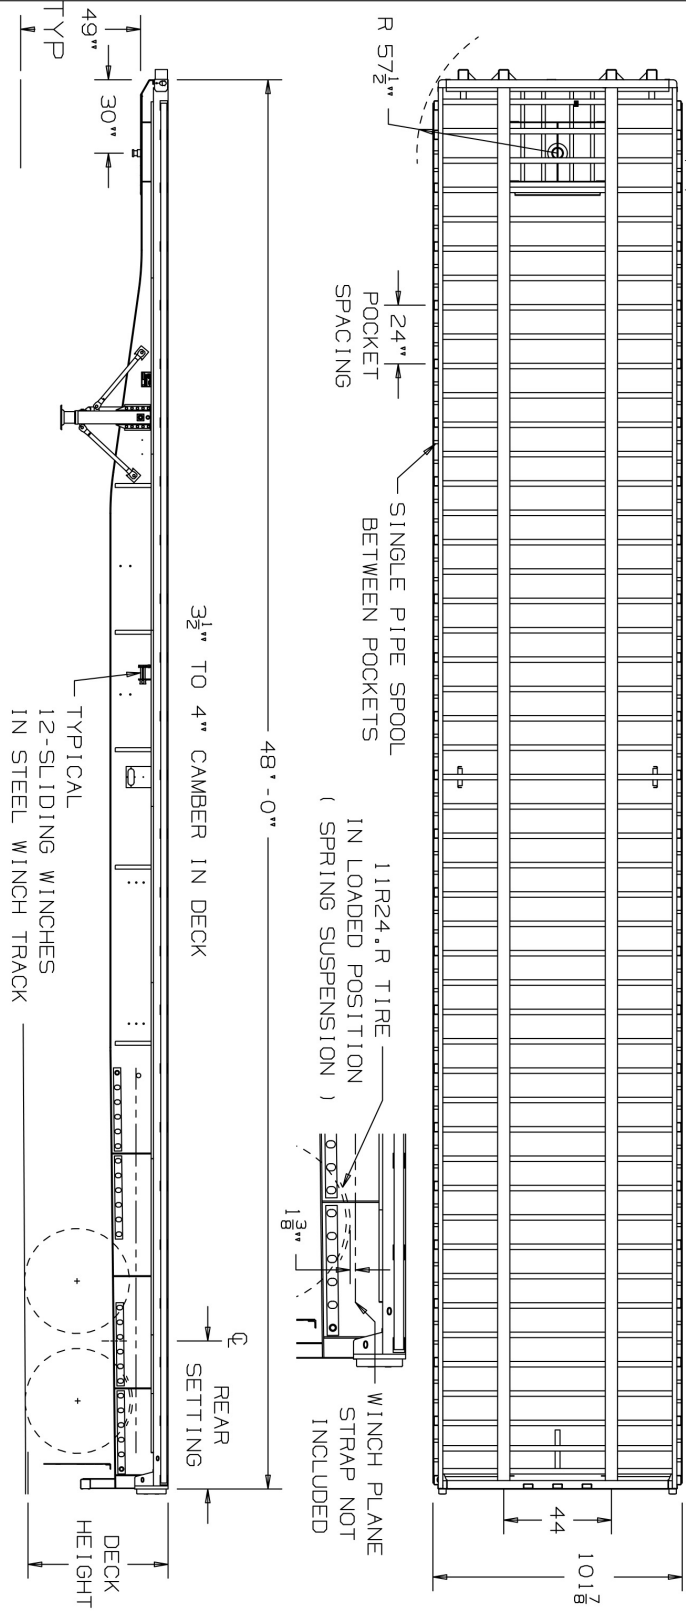

DO NOT SCALE DRAWING DIMENSIONS ADHERE TO ASME Y14.5M-1994 THIRD ANGLE PROJECTION	TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS: ± 1/16 DECIMALS: ± .005 HOLES: ± .005 ANGLES: ± 2° UNITS OF DIMENSION ARE: INCHES	DRAWN BY *	DATE *	CHECKED BY *	DATE *	APPROVED BY *	DATE *
		<b>FONTAINE TRAILER CO.</b> HALEYVILLE, AL HAVSF12SS1					
PRINTED OR COPIED DOCUMENT IS UNCONTROLLED DOCUMENT UNLESS STAMPED ORIGINAL		DRAWING NUMBER: 19233-SALES REV: 0					