

HALE

TRAILER

BRAKE & WHEEL



A031850-A031852
VIN: 25571-25573

SALES | RENTALS | PARTS | SERVICE

Allentown, PA:	800-383-8894	Little Rock, AR:	833-424-8944
Baltimore, MD:	888-601-7500	Portland, ME:	800-325-4253
Concord, NC:	800-438-2250	Raleigh, NC:	833-418-9777
Delmar, DE:	866-486-1400	Scranton, PA:	800-569-1400
Des Moines, IA:	888-673-5011	Springfield, MA:	800-854-5306
Elkton, MD:	800-544-7127	Voorhees, NJ:	866-315-0235
Jacksonville, FL:	800-828-3055	Walpole, MA:	800-854-5310

haletrailer.com | @haletrailer



800-232-6535 *FINANCING AVAILABLE

XL SPECIALIZED TRAILERS

XL 55 MFG: Mini-Deck

OVERALL LENGTH	53'
OVERALL WIDTH	102"
CAPACITY	55,000 LB DISTRIBUTED
WEIGHT +/- 3%	0,000 LB
LENGTH	9' 6" FULL-WIDTH NECK
KINGPIN SETTING	16"
SWING CLEARANCE	78"
5TH WHEEL HEIGHT	50" - CUSTOMER TO CONFIRM
DECKING	SHIMMABLE NECK - SHIMS INCLUDED
CHAIN SLOTS	QUICK COUPLER ON FRONT OF MAIN DECK
D-RINGS	GLAD HANDS ON THE SIDE OF THE UPPER DECK
D-RINGS	WELD HOSE CAGE TO SIDE OF GOOSENECK
MUD FLAPS	1 1/8" ALUMINUM DECKING WITH 1-1/8" APITONG NAILER FLUSH
TOOLBOX	(5) TK STYLE CHAIN SLOTS IN LIEU OF LIGHTING HOLES
	NO BENT PER SIDE
	(2) PAIR OF PAN STYLE D-RINGS ONE IN EACH CORNER
	ALUMINUM MUD FLAPS SET FORWARD
	TOOLBOX AT REAR OF GOOSENECK WITH CHAIN RACK, NO LIGHT
	(3) BEAM DESIGN
	RADIUS PER ENGINEERING
LENGTH	34' 11" (33' 11" CLEAR)
LOADED DECK HEIGHT	12" W 4" GROUND CLEARANCE
DECKING	1/4" WEAR PLATE FULL LENGTH ON BEAMS
	STEEL DECKING BETWEEN MAIN BEAMS WITH DURBAK
	1 3/8" APITONG DECKING, RAISED BETWEEN MAIN BEAMS AND OUTER BEAMS
CROSSMEMBER	(3) TUBES ON OUTSIDES OF MAIN BEAM (ADDS ABOUT 730 LBS.)
BEAMS	4" JR. I-BEAM ON 18" CENTERS
TIE DOWNS	(3) 8" FAB BEAMS
CHAIN DROPS	3/8" STIFFENERS ON 18" CENTERS WITH 1/2" X 2 1/2" BAR UNDER FLANGE
OUTRIGGERS	CHAIN DROPS ON 18" CENTERS - NO LIGHTS BELOW
RAMPS	NONE
	TAPERS TO 4"
	HOSE CAGE PLATE ON MAIN DECK
LENGTH	8' 7"
LOADED DECK HEIGHT	42" - SET RIDE HEIGHT 2" HIGHER THAN STANDARD
AXLES	(2) 25,000 LBS. NOMINAL (5/8" WALL)
SUSPENSION	HENDRICKSON / 25,000 CAPACITY / AIR RIDE
AXLE SPACING	49"
ABS	4S2M WITH SPRING BRAKES ON (2) AXLES
TIRES	255 / 70R / 22.5 (H)
WHEELS	8.25 X 22.5 10-HOLE PILOT MOUNT POLISHED ALUMINUM OUTSIDE, MILLED ALUMINUM INSIDE DISC
BRAKES	16 1/2" X 7"
DRUMS	OUTBOARD
ELECTRICAL	12V SEALED GROTE SYSTEM WITH (3L+5L+3L) DUAL INTENSITY TAIL LIGHT ALUMINUM PACKAGE
	4" AMBER STROBE IN THE 4TH AND 8TH POSITION. 4" TURN AND MARKER IN 1ST AND 11TH
	POSITION 4" STOP AND MARKER LIGHTS IN THE 2ND, 3RD, 5TH, 6TH, 7TH, 9TH, AND 10TH POSITION
DECKING	1 1/8" ALUMINUM DECKING WITH 1-1/8" APITONG NAILER FLUSH
D-RINGS	(0) BENT D-RINGS PER SIDE
D-RINGS	(2) PAIR OF PAN STYLE D-RINGS ONE IN EACH CORNER
D-RINGS	(2) BENT D-RINGS IN TAIL CHANNEL
PAINT	BLACK
	ZINC RICH PRIMER
ADDITIONAL	TRIPLE DONUT FRONT CONNECTOR PLATE, WELD INDICATORS NUMBERS ON THE
	HOLES MANUAL RIDE HEIGHT CONTROL
	NO AXLE STOPS
	(9) TOTAL TRUCKLITE LIGHTS AND CONNECTORS
	(2) ON UPPER DECK, (4) ON MAIN DECK AND (2) ON REAR DECK (REAR CLEARANCE LIGHTS
	TO BE BEEHIVE LOOK
	LOOM AROUND TRUCKLITE LIGHTS AND CONNECTORS
	LIGHTS AND WIRING ABOVE CROSSMEMBERS
	CLOSE FRONT TROUGH SECTION UNDER GOOSENECK BETWEEN MAIN BEAMS W/ DRAIN HOLES
	NYLON LIMIT STRAPS
	RAISE AND LOWER VALVE
	GREASE HUBS IN LIEU OF OIL
	ADD FORMED 3/8" PLATE TO FRONT 6" OF MAIN DECK TO DEFLECT DECK OVER OBSTACLES
	SPACE OUT STIFFENERS ON THE MAIN DECK WITH THE CHAIN DROPS, ADD A STIFFENER AT THE REAR OF THE MAIN
	DECK (2) TK STYLE CHAIN SLOTS IN LIEU OF LIGHTING HOLES IN WHEEL AREA
	(1) SINGLE CHAIN SLOT AT REAR OF WHEEL AREA NEAR ABS LIGHT
	(4) SINGLE CHAIN DROPS IN CENTER OF TRANSITION OF THE WHEEL AREA
	LIQUID FILLED AIR GAUGE
	4-WAY AT REAR
	GLADHAND DUMP VALVE

DISCLAIMER



Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical.

Equipment availability, prices and specifications are subject to change without notice.

DocuSign Envelope ID: 6CAAADCD-7A99-4BA6-B2CC-533A341E886A
PLEASE CHECK CAREFULLY AND MARK ALL CHANGES REQUIRED. A COPY OF THIS DRAWING MUST BE SIGNED AND RETURNED TO XL SPECIALIZED TRAILERS BEFORE THE TRAILER CAN BE DESIGNED. BY YOUR APPROVAL/SIGNATURE, YOUR COMPANY IS AGREEING TO THE XL TERMS AND CONDITIONS OF SALES: WWW.XLSPECIALIZEDTRAILER.COM/ABOUT-XL/TERMS-CONDITIONS.COM
ANY CHANGES AFTER THIS TIME WILL BE SUBJECT TO A CHANGE ORDER FEE AND DELAYS.

VIN: 25571-73
COMPANY: _____
NAME: _____ SIGNATURE: _____ DATE: _____

☐ APPROVED AS IS
☐ APPROVED WITH NOTES
☐ NOT APPROVED, NEW
DRAWING REQUESTED


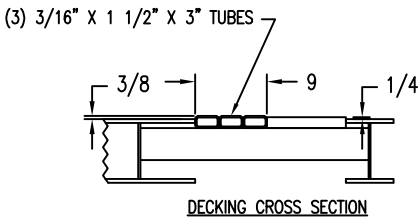
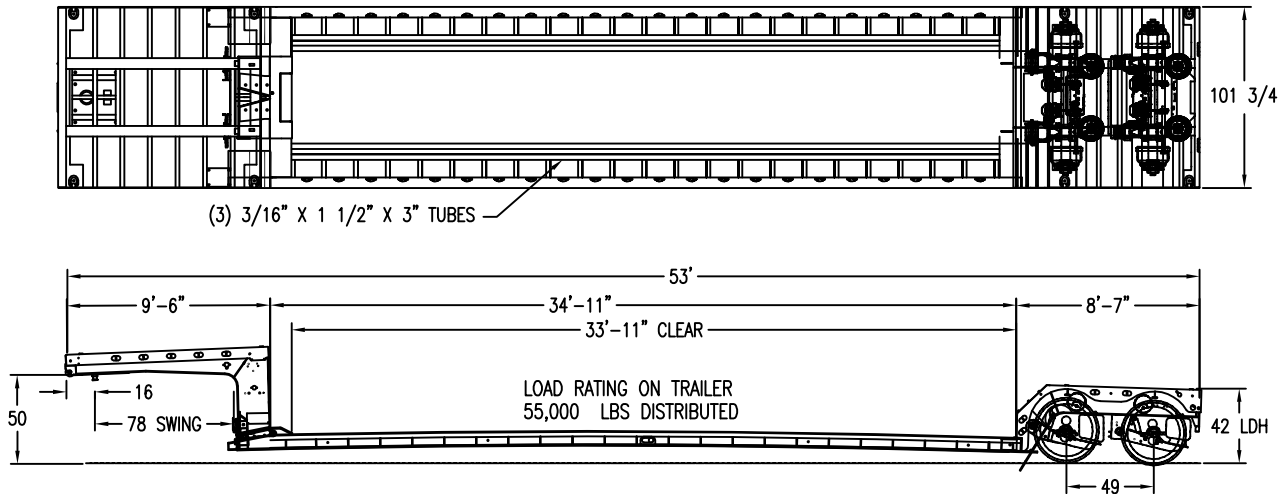


UPPER DECK:
SHIMMABLE NECK-SHIMS INCLUDED
GLAD HAND ON SIDE OF GOOSENECK
WELD HOSE CAGE TO SIDE OF GOOSENECK
1 1/8" ALUMINUM DECKING WITH 1-1/8" APITONG NAILER FLUSH
(5) TK STYLE CHAIN SLOTS PER SIDE ON SIDE PLATES IN LIEU OF LIGHTENING HOLES
(2) PAIR PAN D-RINGS - (1) IN EACH CORNER
ALUMINUM MUD FLAPS - SET FORWARD TOOLBOX AT REAR OF GOOSENECK WITH CHAIN RACK, NO LIGHT


MAIN DECK:
3 BEAM DESIGN
RADIUS PER ENG.
12" LOADED DECK HEIGHT
4" GROUND CLEARANCE
1/4" WEAR PLATE FULL LENGTH ON BEAMS
STEEL DECKING BETWEEN MAIN BEAMS WITH DURBAK
1 3/8" APITONG DECKING, RAISED BETWEEN MAIN BEAMS AND OUTER BEAMS
4" JR. I-BEAM ON 18" CENTERS
(3) 8" FAB BEAMS
3/8" STIFFENERS ON 18" CENTERS WITH 1/2" x 2 1/2" BAR UNDER FLANGE
CHAIN DROPS ON 18" CENTERS
-NO LIGHTS BELOW
RAMPS TAPER TO 4"
HOSE CAGE PLATE ON MAIN DECK
TUBES ON OUTSIDE OF MAIN BEAMS FOR LOAD SUPPORT

REAR DECK:
42"-SET RIDE HEIGHT 2" HIGHER THAN STANDARD
(2) 25,000 LBS. NOMINAL (5/8" WALL) HENDRICKSON / 25,000 CAPACITY / AIR RIDE 452M WITH SPRING BRAKES ON (2) AXLES 255 / 70R / 22.5 (H) TIRES
8.25 X 22.5 10-HOLE PILOT MOUNT POLISHED ALUMINUM OUTSIDE, MILLED ALUMINUM INSIDE (3L + 5L + 3L) DUAL INTENSITY TAIL LIGHT ALUMINUM PACKAGE
4" AMBER STROBE W/SWITCH AS THE 4TH & 8TH POSITION
4" TURN & MARKER IN 1ST & 11TH POSITION
4" STOP & MARKER LIGHTS IN 2ND, 3RD, 5TH, 6TH, 7TH, 9TH, & 10TH POSITIONS
1 1/8" ALUMINUM DECKING WITH 1-1/8" APITONG NAILER FLUSH
(2) TK STYLE CHAIN SLOTS PER SIDE ON SIDE PLATES IN LIEU OF LIGHTENING HOLES
(1) SINGLE CHAIN SLOT AT REAR OF WHEEL AREA (NEAR ABS LIGHT)
(2) PAIR PAN D-RINGS - (1) IN EACH CORNER
(4) SINGLE CHAIN SLOTS IN CENTER OF TRANSITION OF WHEEL AREA
(2) BENT D-RINGS IN TAIL CHANNEL

ADDITIONAL:
BLACK PAINT
TRIPLE DONUT FRONT CONNECTOR PLATE WITH WELDED INDICATORS FOR HOLES
MANUAL RIDE HEIGHT CONTROLLED LIGHTING NO AXLE STOPS
(9) TOTAL TRUCKLITE LIGHTS AND CONNECTORS
(2) ON UPPER DECK, (4) ON MAIN DECK AND (2) ON REAR DECK (REAR CLEARANCE LIGHTS TO BE BEEHIVE LOOK)
LOOM AROUND TRUCKLITE LIGHTS AND CONNECTORS LIGHTS AND WIRING ABOVE CROSMEMBERS
CLOSE FRONT TROUGH SECTION UNDER GOOSENECK BETWEEN MAIN BEAMS W/ DRAIN HOLES
NYLON LIMIT STRAPS
RAISE AND LOWER VALVE
GREASE HUBS IN LIEU OF OIL
ADD FORMED 3/8" PLATE TO FRONT 6" OF MAIN DECK TO DEFLECT DECK OVER OBSTACLES
LIQUID FILLED AIR GAUGE
4-WAY AT REAR
GLADHAND DUMP VALVE



NOTE: ALL DIMENSIONS SHOWN ARE IN THE UNLOADED CONDITION.
DIMENSIONS WILL CHANGE SLIGHTLY DURING MANUFACTURING

 1086 South 3rd St. Manchester, IA 52057 THIS DRAWING IS THE PROPERTY OF XL SPECIALIZED TRAILERS WHICH CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL DISCLOSED. IT IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY AND MAY NOT BE COPIED OR USED FOR MANUFACTURING OF ANYTHING SHOWN WITHOUT SPECIFIC WRITTEN PERMISSION OF XL SPECIALIZED TRAILERS.		PART NO. Y44554					
		DESC. MFGM,55,53,102,3B,5D,9CL,TD,BLK					
DIM TOL: ± 1/16	ANG TOL: ± 1°	SIZE A	INITIALS MS	DATE	SHEET 1	OF 2	REV -



PLEASE CHECK CAREFULLY AND MARK ALL CHANGES REQUIRED. A COPY OF THIS DRAWING MUST BE SIGNED AND RETURNED TO XL SPECIALIZED TRAILERS BEFORE THE TRAILER CAN BE DESIGNED. BY YOUR APPROVAL/SIGNATURE, YOUR COMPANY IS AGREEING TO THE XL TERMS AND CONDITIONS OF SALES: WWW.XLSPECIALIZEDTRAILER.COM/ABOUT-XL/TERMS-CONDITIONS.COM ANY CHANGES AFTER THIS TIME WILL BE SUBJECT TO A CHANGE ORDER FEE AND DELAYS.

VIN: 25571-73

COMPANY: _____

NAME: _____ SIGNATURE: _____ DATE: _____

- ☐ APPROVED AS IS
☐ APPROVED WITH NOTES
☐ NOT APPROVED, NEW DRAWING REQUESTED

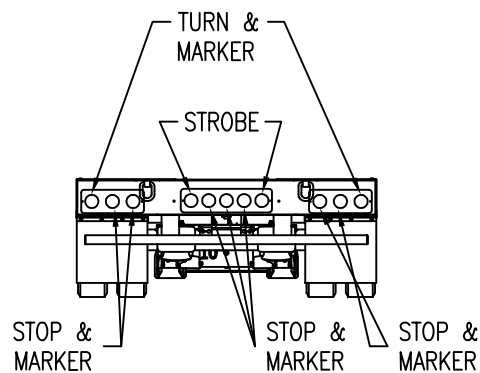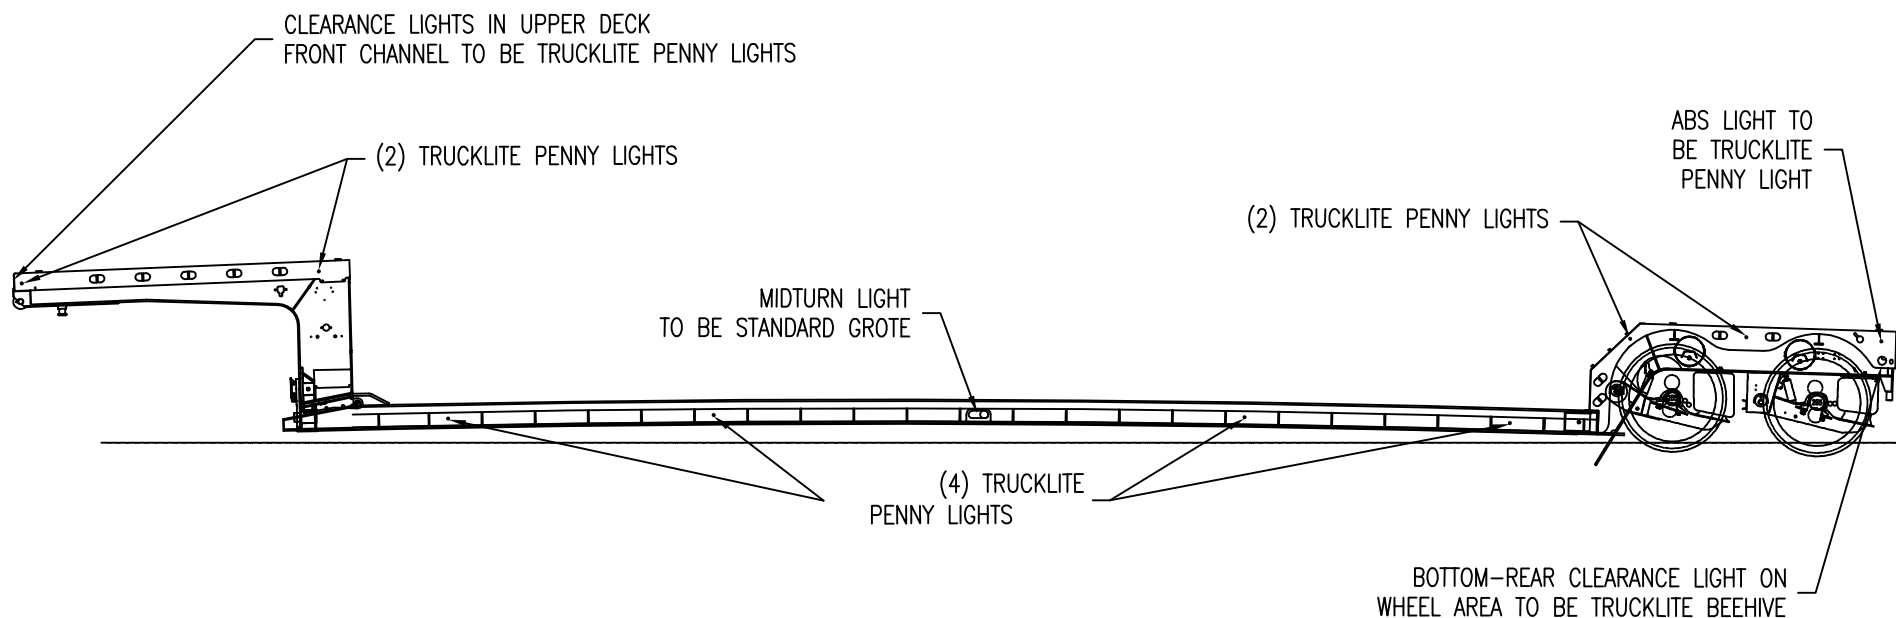

REAR VIEW

NOTE: ALL DIMENSIONS SHOWN ARE IN THE UNLOADED CONDITION.
 DIMENSIONS WILL CHANGE SLIGHTLY DURING MANUFACTURING

 1086 South 3rd St. Manchester, IA 52057 THIS DRAWING IS THE PROPERTY OF XL SPECIALIZED TRAILERS WHICH CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL DISCLOSED. IT IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY AND MAY NOT BE COPIED OR USED FOR MANUFACTURING OF ANYTHING SHOWN WITHOUT SPECIFIC WRITTEN PERMISSION OF XL SPECIALIZED TRAILERS.		PART NO.		Y44554			
		DESC.					
MFGM,55,53,102,3B,5D,9CL,TD,BLK		SIZE	INITIALS	DATE	SHEET	OF	REV
DIM TOL: ± 1/16		ANG TOL: ± 1°		A	MS	2	2
							-