HALE TRAILER BRAKE & WHEEL

SALES | RENTALS | PARTS | SERVICE

Allentown, PA:	800-383-8894	Little Rock, AR:	833-424-8944
Baltimore, MD:	888-601-7500	Portland, ME:	800-325-4253
Concord, NC:	800-438-2250	Raleigh, NC	833-418-9777
Delmar, DE:	866-486-1400	Scranton, PA:	800-569-1400
Des Moines, IA:	888-673-5011	Springfield, MA:	800-854-5306
Elkton, MD:	800-544-7127	Voorhees, NJ:	866-315-0235
Jacksonville, FL:	800-828-3055	Walpole, MA:	800-854-5310

haletrailer.com | @haletrailer

800-232-6535 *FINANCING AVAILABLE

FONTAINE TRAILER

A033231-A033235

VIN: 578071-578075

Infinity Drop Deck 48 Wide Spread Air (HAICD12WSA)

Detailed Specifications

General	
Model	HAICD12WSA
Length x Width	48 feet x 102 inches
Deck Length	10 feet Front and 38 feet Rear
Rear Deck Height	40 inches Loaded
Suspension	Wide Spread Air
Frame Rating	**80,000 lbs Distributed - 55,000 lbs Concentrated in 4 feet- GAWR and Tire Ratings Determine Legal Payloads**
Kingpin Setting	18 inches
Fifth Wheel Height	49 inches
Axle Spread	122 inches - Set at Rear
VIN Plate	Bilingual US/Canadian VIN plate
Estimated Weight	Est. Weight: 10480 lbs. +/-3%
Structural	
Main Beams	**130K Load Bearing Flanges**
Crossmembers	18 inch Centers Front Deck / 12 inch Centers Rear Deck - 4 inch Jr. I-Steel
Single Coil Hauling Package	**Included**
Knee Braces	Fabricated on Approx. 60 inch C/C
Side Rails	**Exclusive Revolutionary RASR Rail Technology - One Piece Routed Aluminum Designed for Strength and Impact**
Stake Pockets	**Routed Aluminum on 24-inch Centers (2 Load Securement Openings in Between Stake Pockets)**
Rubrail	**Integrated with Side Rail**
Front Corners	Tapered
Bumper	Weld-On; Meets U.S. Underride Requirements - Painted Steel
Winch Track	**Full-Length Integrated Double L Type Aluminum on Both Sides Where Possible**
Chain Cargo Tie Downs	15 Pair - Recessed in Siderails
Bulkhead Pockets	4 - DOT Type Bulkhead Pockets Only - Welded to Front
Landing Gear	
Landing Gear	OEM Standard
Flooring	
Flooring	1 1/8 inch Aluminum with 4 Wood Nailer Strips
Suspension	
Suspension Detail	Hendrickson AANL23K Intraax Air Ride
Number of Axles	2
Axle Spindle	Tapered
Brakes	Spring Brakes, Auto Slacks
Hubs and Drums	10-Hole Hub-Piloted with Outboard Cast Drums
Wheel Ends	Grease in Hubs - *** 5-Year Wheel End Warranty ***
Tire Inflation System	None Standard
Air Lift	None Standard
Wheels and TIres	
Wheels	22.5 x 8.25 Steel Disc Wheels - Pre-Painted White - STANDARD
Tires	255/70R 22.5 16PR OEM Standard tires

FONTAINE® TRAILER

Detailed Specifications

Air System	
Air Line Filters	(2) Meritor In-line Type Installed
ABS	4S/2M - No Cable or Tool
Full System Dump	Auto Glad Hand Dump Installed
Electric Dump Valve	Wired to 7-Way Auxiliary Socket to Dump Rear Axle
Gladhand Position	Front Gladhands and Electrical Connections in Center of Trailer
Electrical System	
Tailskirt Lights	LED: 2 Lights/Side on Rear
Side Marker Lights	LED: 3 Lights/Side
Paint and Decal	
Paint	Black Urethane on Steel Parts with Infinity Decals
Conspicuity Tape	Per NHTSA Specs - Installed in Recess on Rubrails
Unit Number & Decals	Not Available
Miscellaneous	
Mudflaps	**2 Sets OEM Standard; Spring Loaded Brackets Behind Front Axle**
Sliding Winches	12 standard: 2 Top Deck - 10 Lower Deck; Sliding Rope Hook/Winch Strap Hook Retainers
Winch Location	Equal Both Sides
27' Winch Straps	None Standard
30' Winch Straps	None Standard
Dock Bumpers	1 Pair Rubber on Rear
Sliding J-Hook for Strap with Ring	None Standard
Registration Holder	Install Registration Holder - OEM Standard
Options	
Bulkhead	None Standard
Spare Tire Carrier	1 Standard - Mounted Between Lower Gooseneck Beams at Drop
Hubodometer	None Standard
Tool Box	None Standard
Literature	
Trailer Literature	Infinity Brochure

DISCLAIMER


Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical.
Equipment availability, prices and specifications are subject to change without notice.

THIS DOCUMENT REMAINS PROPERTY OF FONTAINE TRAILER COMPANY. ITS CONTENTS ARE CONFIDENTIAL AND PROPRIETARY.
DO NOT REPRODUCE, USE OR DISCLOSE ANY INFORMATION WITHOUT WRITTEN CONSENT FROM FONTAINE TRAILER COMPANY.

FONTAINE® TRAILER

NOTE:
FRAME RATINGS DENOTE WHAT THE TRAILER FRAME IS CAPABLE OF SUPPORTING. THE SUSPENSION/TIRES MAY NOT BE CAPABLE OF SUPPORTING THESE LOADS WHEN CONCENTRATED OVER THE SUSPENSION AREA. REFER TO THE TRAILER GVWR AND GAWR.

FRAME RATINGS	
DISTRIBUTED	80,000
COIL	51,497
60"	54,968
120"	59,014
180"	63,702

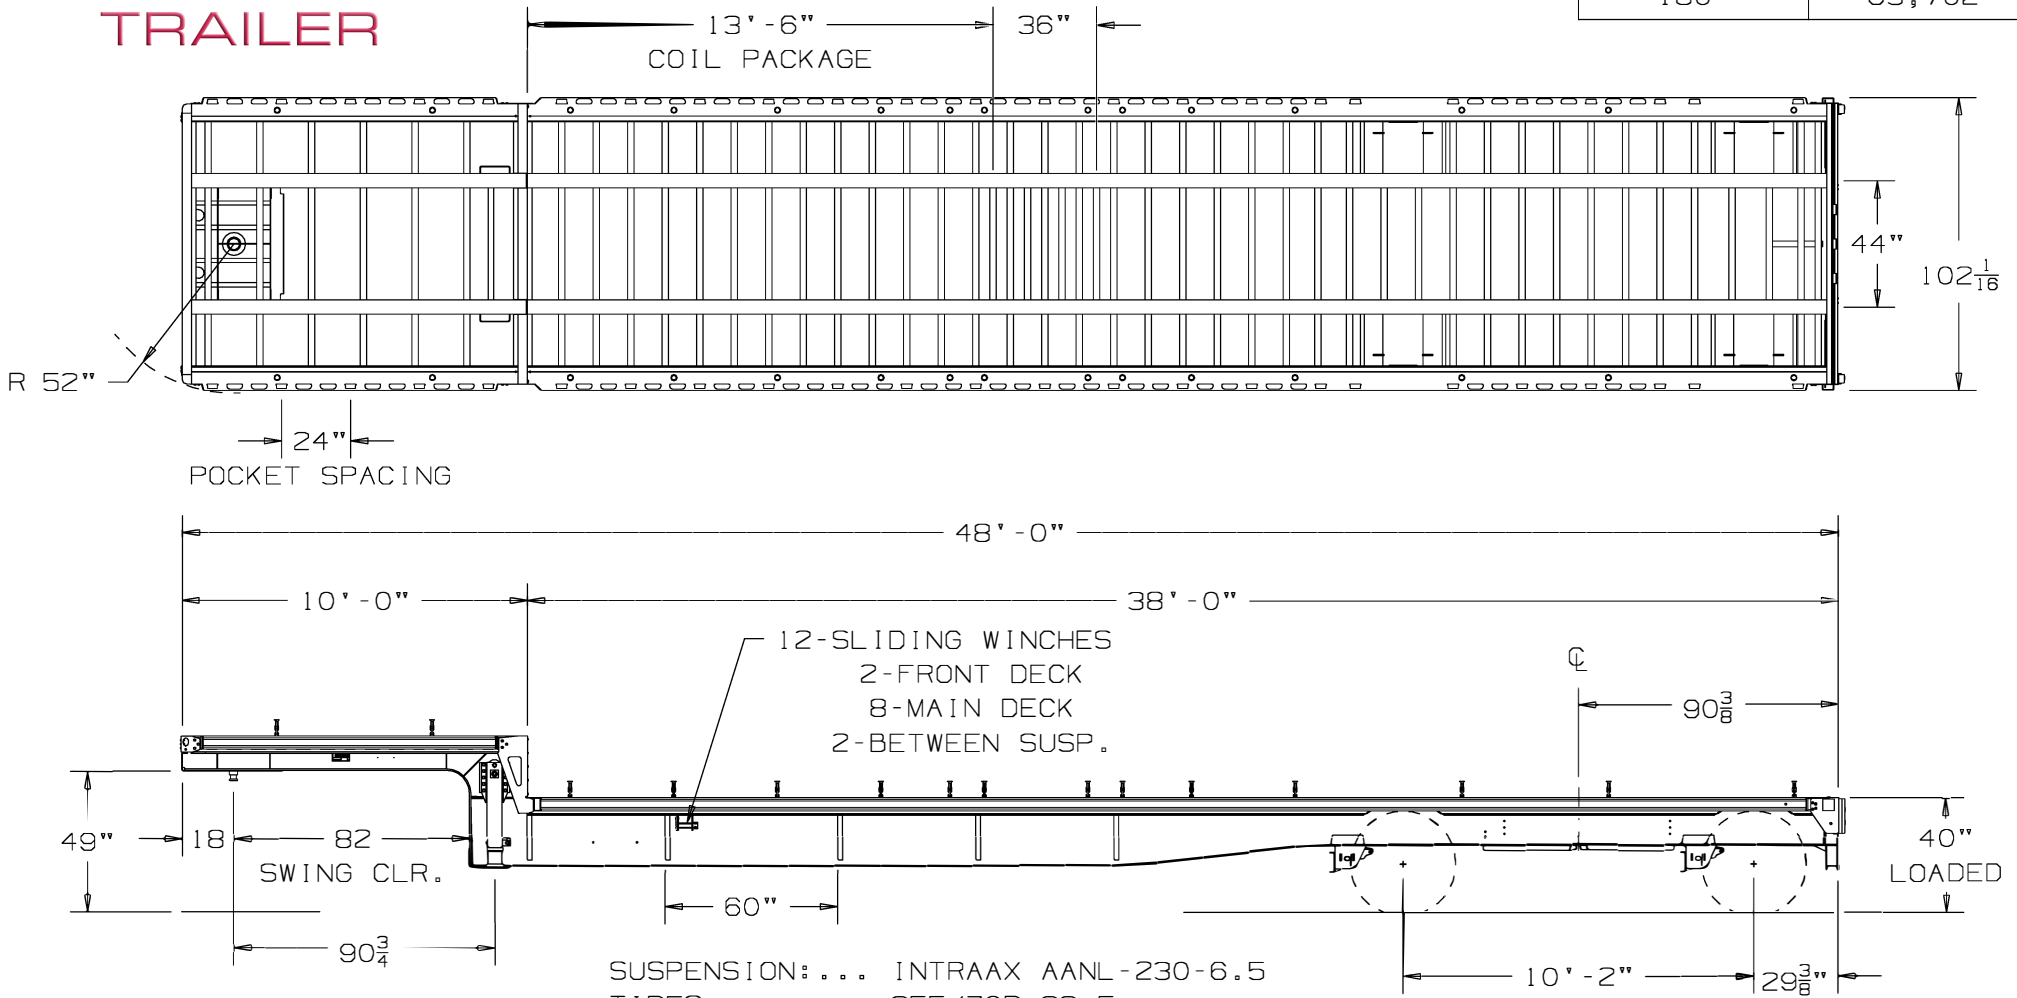

SUSPENSION:... INTRAAX AANL-230-6.5
TIRES: 255/70R 22.5
BRAKES: ..... WABCO 4S/2M
FLOORING: .... ALUMINUN W/4-NAILERS

DO NOT SCALE DRAWING	TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY *	DATE *	FONTAINE TRAILER CO. HALEYVILLE, AL	PRINTED OR COPIED DOCUMENT IS UNCONTROLLED DOCUMENT UNLESS STAMPED ORIGINAL
DIMENSIONS ADHERE TO: ASME Y14.5M-1994	FRACTIONS: ± 1/16	CHECKED BY	DATE	TITLE: HAICD12WSA INFINITY DROP DECK	SIZE: A / SCALE: * : * / SHEET: *
THIRD ANGLE PROJECTION	DECIMALS: . ± .06	APPROVED BY	DATE		DRAWING NUMBER 18730-SALES / REV. H
	HOLES: .. ± .005				
	ANGLES: ... ± 2°				
	UNITS OF DIMENSION ARE: INCHES				