

HALE

TRAILER

BRAKE & WHEEL



A038059-A038073
VIN: 83522-83536

SALES | RENTALS | PARTS | SERVICE

Allentown, PA:	800-383-8894	Little Rock, AR:	833-424-8944
Baltimore, MD:	888-601-7500	Portland, ME:	800-325-4253
Concord, NC:	800-438-2250	Raleigh, NC:	833-418-9777
Delmar, DE:	866-486-1400	Scranton, PA:	800-569-1400
Des Moines, IA:	888-673-5011	Springfield, MA:	800-854-5306
Elkton, MD:	800-544-7127	Voorhees, NJ:	866-315-0235
Jacksonville, FL:	800-828-3055	Walpole, MA:	800-854-5310

haletrailer.com | @haletrailer



800-232-6535 *FINANCING AVAILABLE

Infinity Flat 48' Wide Spread Air (Model Code: HAICF12WSA)

Length / Width: 48 feet x 102 inches
Suspension Type: Wide spread air
Frame Rating: 80,000 lbs distributed - 55,000 lbs concentrated in 4 feet- GAWR and tire ratings determine legal payloads
Flooring: 1 1/8 inch aluminum with 4 wood nailer strips
Crossmembers: 12 inch centers - 4 inch jr. I-steel
Single Coil Hauling Package: Included
Side Rails: Exclusive Revolutionary RASR Rail Technology -- one piece routed aluminum designed for strength and impact
Chain Cargo Tie Downs: 15 pair recessed in siderails
Stake Pockets: Routed aluminum on 24 inch centers (2 load securement openings between stake pockets)
Rubrail: Integrated with siderail
Main Beams: 130K load bearing flanges
Kingpin: 30 inches
Loaded Fifth Wheel Height: 49 inches
Landing Gear: OEM Standard with Forward & Rear Bracing
Knee Braces: Fabricated on approx. 60 inch C/C
Bulkhead Pockets: 4 DOT type bulkhead pockets only - welded to front
Bulkheads: Removable aluminum 4 post DOT type bulkhead - no turnback - 48 inches high for use with Front Pockets
Number of Axles: 2
Axle Spindle: Tapered
Brakes: Spring brakes, auto slacks, Aluminum Air Tank
Air Line Filters: (2) Meritor In-line type installed
ABS: 2S/1M - no cable or tool
Axle Spread: 122 inches - set at rear
Hub and Drums: 10-hole hub-piloted with outboard cast drums
Wheel Ends: Grease in hubs - *** 5-year wheel end warranty ***
Wheels: 22.5 x 8.25 4 steel disc inside wheels - 4 aluminum High Polish outside with 4 Spacers
Tires: 11R 22.5 14PR OEM standard tires
Tire Inflation System: None standard
Suspension Detail: Hendrickson AANT23K Intraax air ride
Auto Glad Hand Dump : Installed
Electric Dump Valve: Wired to 7-way auxiliary socket to dump rear axle
Air Lift: Lift Not Included: *On Front Axle Only Install Hendrickson UBL-401 Front Bolt-on Suspension Hanger Brackets (LH C-32038-1C & RH C-32038-2C), Weld-on Lift Brackets (LH C-28617-1 & RH C-28617-2), & A-30634-1 Bolt Kit; Install Appropriate K-Brace To Fit Around These Brackets (**HALE TRAILER WILL FURNISH AND INSTALL (2) Air Springs in Addition to other required plumbing and Lift axle Control Components)
Front Corners: Tapered steel
Electrical System: LED: 3 lights/side, 3 lights/side on rear - STANDARD
Paint: Black urethane on steel parts with Infinity decals - STANDARD
Conspicuity Tape: Per NHTSA specs - installed in recess on rubrails
Bumper: Weld-on type - meets underride requirements - painted steel
Mudflaps: 2 sets OEM standard; Spring loaded brackets behind front axle
Spare Tire Carrier: Spare tire carrier - bolted on curbside
Winch Track: Full length integrated double L type aluminum on both sides -- STANDARD
Sliding Winches: 14 Zinc Finish: 7 per side: sliding Rope Hook / Winch Strap Hook Retainers
27 foot Winch Straps: None standard
30 foot Winch Straps: None standard
Dock Bumpers: 1 pair rubber on rear
Hubodometer: None standard
Registration Holder: Install registration holder - OEM standard
Tool Box: None standard
VIN Plate: Bilingual US/Canadian VIN plate
Unit Numbers & Decals: Not installed

Estimated Weight (lbs) (+/- 3%) **10,369**

DISCLAIMER

Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical. Equipment availability, prices and specifications are subject to change without notice.


THIS DOCUMENT REMAINS PROPERTY OF FONTAINE TRAILER COMPANY. ITS CONTENTS ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE, USE OR DISCLOSE ANY INFORMATION WITHOUT WRITTEN CONSENT FROM FONTAINE TRAILER COMPANY.

FRAME RATINGS

DISTRIBUTED	80,000
CDIL	49,000
60"	52,400
120"	58,380
180"	61,020

NOTE:

FRAME RATINGS DENOTE WHAT THE TRAILER FRAME IS CAPABLE OF SUPPORTING. THE SUSPENSION/TIRES MAY NOT BE CAPABLE OF SUPPORTING THESE LOADS WHEN CONCENTRATED OVER THE SUSPENSION AREA. REFER TO THE TRAILER GVWR AND GAWR.

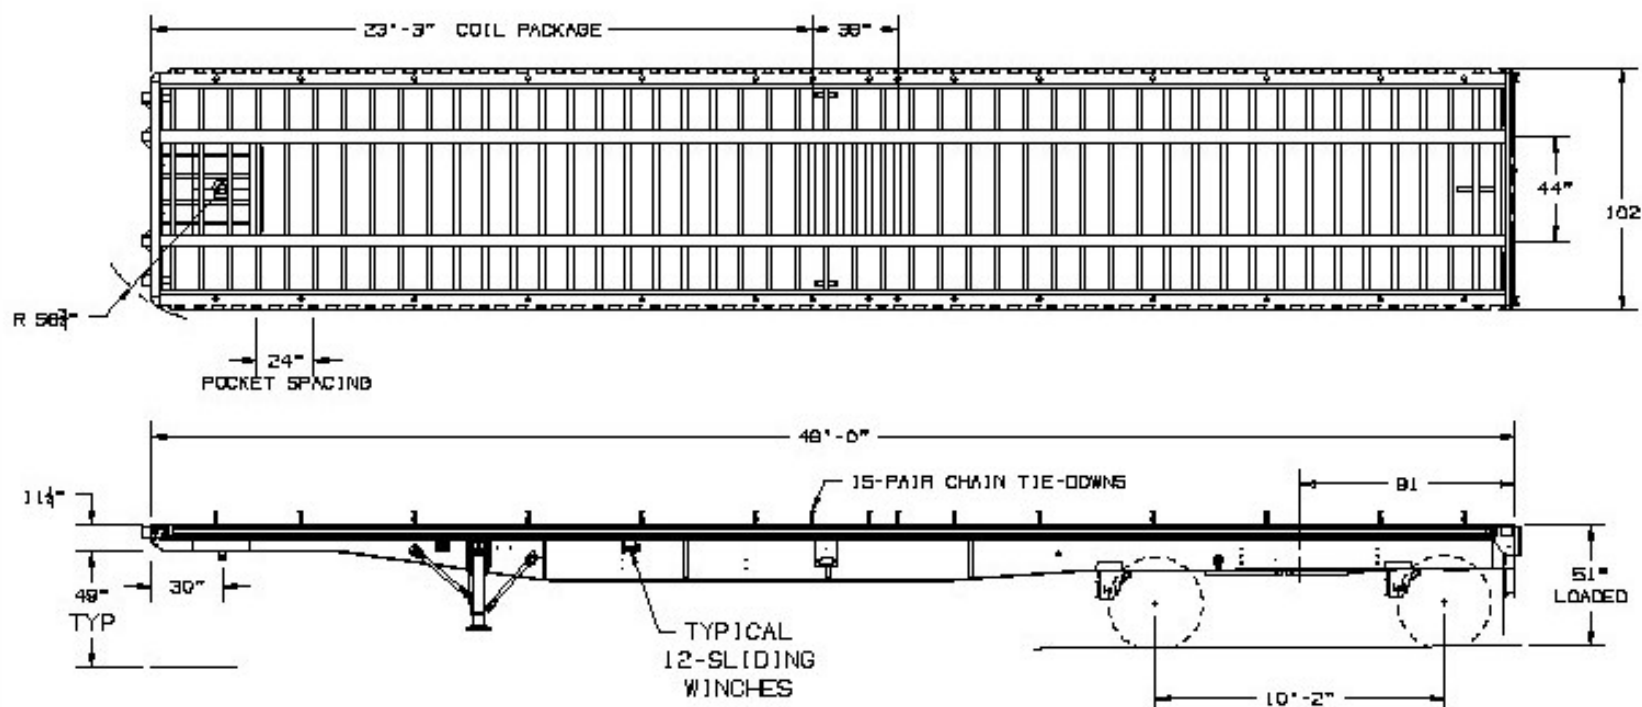

KING PIN HEIGHT RANGE

47^m48th

48" (TYPICAL)

50

DO NOT SCALE DRAWING		TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN BY .		DATE .		 FONTAINE TRAILER CO. HALEYVILLE, AL		PRINTED OR COPIED DOCUMENT IS UNCONTROLLED DOCUMENT UNLESS STAMPED ORIGINAL	
DIMENSIONS ADHERE TO: ASME Y14.5M-1994		FRACTIONS ± 1/8 DECIMALS ± .08 HOLES ± .005 ANGLES ± 2° UNITS OF DIMENSION ARE:		CHECKED BY		DATE		TITLE		SIZES A 1:1 1/2	
THIRD ANGLE PROJECTION				APPROVED BY		DATE		HAICF1ZWSA		DRAWING NUMBER 18944-SALES	
										REV	