HALE TRAILER BRAKE & WHEEL

FONTAINE TRAILER

A039315-A039320
VIN: 83471-83476

SALES | RENTALS | PARTS | SERVICE

Allentown, PA:	800-383-8894	Little Rock, AR:	833-424-8944
Baltimore, MD:	888-601-7500	Portland, ME:	800-325-4253
Concord, NC:	800-438-2250	Raleigh, NC	833-418-9777
Delmar, DE:	866-486-1400	Scranton, PA:	800-569-1400
Des Moines, IA:	888-673-5011	Springfield, MA:	800-854-5306
Elkton, MD:	800-544-7127	Voorhees, NJ:	866-315-0235
Jacksonville, FL:	800-828-3055	Walpole, MA:	800-854-5310

haletrailer.com | @haletrailer

800-232-6535 *FINANCING AVAILABLE

Revolution 52 Alum Flat 53' Rear Axle Slide (Model Code: HAR5222RSA)

Length / Width: 53 feet x 102 inches **Order Number:** 40082 R.1

Suspension Type: Rear axle slide; This Trailer Design Does NOT Meet Proposed GHG2 Compliance Requirements

Frame Rating: 80,000 lbs distributed - 52,000 lbs concentrated in 4 feet- GAWR and tire ratings determine legal payloads

Flooring: NEW for 2026 Year Model - FLAT TOP-NO GROOVES (*Doesn't Accept Floor Securement Devices) -- Knurled extruded 3-1/8 aluminum - StirLITE Friction Stir Welded Floor; 2 wood nailer strips; Heavy wall extrusions in single coil area and one at rear

Side Rails: Exclusive **Revolutionary RASR Rail Technology** -- one piece routed aluminum designed for strength and impact

Stationary Chain Cargo Tie Downs: 17 pair - recessed in siderails

Stake Pockets: Routed Aluminum on 24 inch centers (2 load securement openings in between stake pockets)

Rubrail: Integrated with side rail

Main Beams: Extruded aluminum - 8.25 inch flange

Kingpin: 30 inches

Loaded Fifth Wheel Height: 49 inches

Landing Gear: Jost AX100G19 **ALUMILIGHT Aluminum Landing Gear** with forward & rear bracing

Bulkheads: None standard

Number of Axles: 2

Axle Spindle: Tapered

Brakes: Spring brakes, auto slacks, Aluminum air tank

Air Line Filters: (2) Meritor In-line type installed

ABS: 4S/2M - no cable or tool

Axle Spread: 122 inches open - 54 inches closed - Meets California, Canadian RTAC and BC dimensional specifications in closed position

Hub and Drums: 10-hole hub-piloted with outboard cast drums - STANDARD

Wheel Ends: Grease in hubs - *** 5-year wheel end warranty ***

Wheels: 22.5 x 8.25 4 steel disc inside wheels - 4 aluminum High Polish outside with 4 Spacers

Tires: 295/75R 22.5 14PR OEM standard tires

Tire Inflation System: Hendrickson TIREMAAX PRO inflation system

Suspension Detail: Hendrickson air ride

Air Assist Slide Box Pins: Standard mount of controls on slider frame

Auto Glad Hand Dump : Installed

Electric Dump Valve: Wired to 7-way auxiliary socket to dump rear axle

Front Corners: Tapered

Electrical System: LED: 5 Lights/Side; Rear with 3 4-inch Round Lights/Side, 3 Round Lights Center Cluster

Other Electrical Specifications: 4 way socket on rear with one hot/one ground pin for wide load and strobe light connections

Paint: Black urethane on steel parts with Revolution decals - STANDARD

Conspicuity Tape: Per NHTSA specs - installed in recess on rubrails

Bumper: Bolt-On; Meets underride requirements

Mudflaps: 1 set of Fontaine Red, White, and Blue Mudflaps behind the rear axle

Spare Tire Carrier: None standard

Winch Track: Dual full-length integrated aluminum -- double L design

Sliding Winches: 12 standard; 6 each side; sliding rope hook/ winch strap hook retainers - STANDARD

27 foot Winch Straps: None standard

30 foot Winch Straps: None standard

Sliding J-Hook for Ring vs. Flat Hook on 4" Strap: None standard

Dock Bumpers: 1 pair rubber on rear

Hubodometer: None standard

Registration Holder: Install registration holder - OEM standard

Tool Box: None standard

VIN Plate: Bilingual US/Canadian VIN plate **Estimated Weight (lbs) (+/- 3%)** **10,184**

DISCLAIMER

Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical. Equipment availability, prices and specifications are subject to change without notice.

THIS DOCUMENT REMAINS PROPERTY OF FONTAINE TRAILER COMPANY. ITS CONTENTS ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE, USE OR DISCLOSE ANY INFORMATION WITHOUT WRITTEN CONSENT FROM FONTAINE TRAILER COMPANY.

NOTE:
FRAME RATINGS DENOTE WHAT THE TRAILER FRAME IS CAPABLE OF SUPPORTING. THE SUSPENSION/TIRES MAY NOT BE CAPABLE OF SUPPORTING THESE LOADS WHEN CONCENTRATED OVER THE SUSPENSION AREA. REFER TO THE TRAILER GVWR AND GAWR.

FRAME RATINGS	
DISTRIBUTED	80,000
48"	52,000



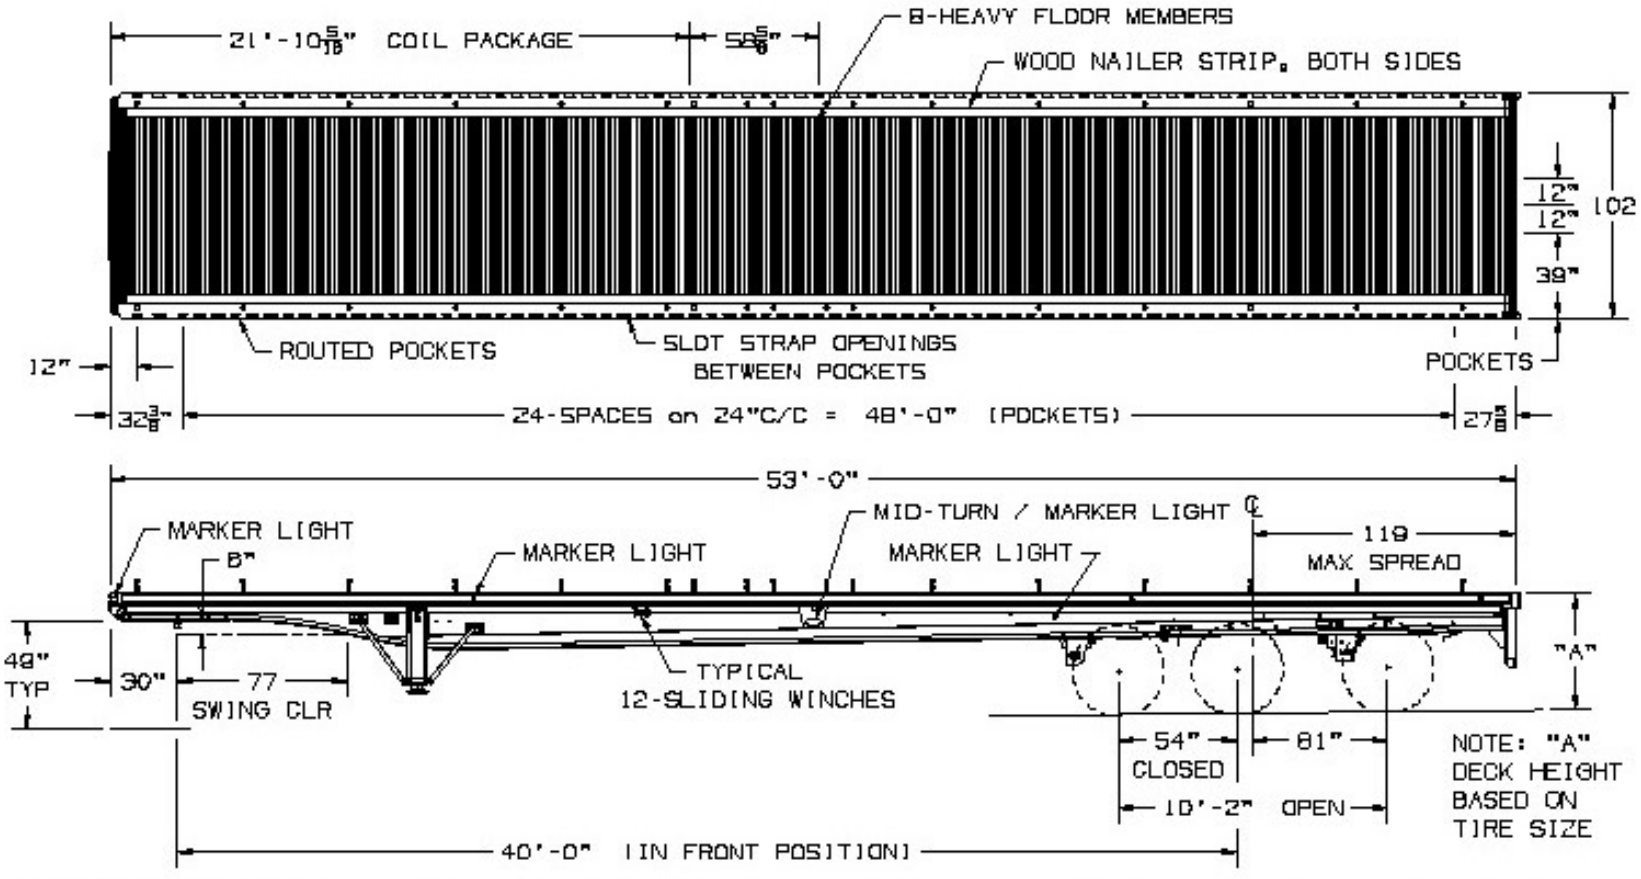

NOTE: "A" DECK HEIGHT BASED ON TIRE SIZE

KING PIN HEIGHT RANGE
47"
48"
49" (TYPICAL)
50"

DO NOT SCALE DRAWING
DIMENSIONS ADHERE TO: ASME Y14.5M-1994
THIRD ANGLE PROJECTION

TOLERANCES
UNLESS OTHERWISE SPECIFIED
FRACTIONS: ± 1/16
DECIMALS: .x ± .08
HOLES: .xx ± .005
ANGLES: ... ± 2°
UNITS OF DIMENSION ARE: INCHES

DRAWN BY	DATE
*	*
CHECKED BY	DATE
APPROVED BY	DATE

FONTAINE TRAILER CO.
HALEYVILLE, AL

TITLE:
HCR5222RSA

PRINTED OR COPIED DOCUMENT IS UNCONTROLLED DOCUMENT UNLESS STAMPED ORIGINAL

SIZE	SCALE	SHEET
A	*:*	1 OF 1

DRAWING NUMBER: 18724-SALES
REV.: H