



Hale Trailer Brake & Wheel
A004417
VIN 476193

HALE
TRAILER
BRAKE & WHEEL

SX3

Three Axle Side Dump Trailer



37' to 50' frame lengths ◀ Stockpile or windrow ▶ Watertight; no leaks ▶ Low load height

SX3
Three Axle Side Dump



SX3

Three Axle Side Dump Trailer



Model SX3-4234 SmithCo Side Dump Trailer

Specs shown are for 41'5" frame length; other configurations available.

Frame Length	41' 5"
Tub Length	34'
Width	102'
Height	8' 3" at Tub side, 9' 6" at Center
Tub Construction	1/4" Thick, AR400 Steel (or equivalent) 3/16" Thick, AR400 Steel (or equivalent) is optional External Column Supports, No Center Tub Divider
Frame Construction	80/100 KSI, Fabricated Steel I-Beam
Kingpin	2" Kingpin, 18" Setting, Replaceable Type
Landing Gear	Two Speed, Non-Load Bearing
Bumper	Push Bar Type, Bolt-On
Cylinders	3500 PSI, 5" bore
Hinges	Self-Aligning, Spherical Bearing Type (greaseable)
Suspension	Air Ride Suspension Standard; Spring Ride Available
Axles	(3) 25,000# capacity
Hubs	10 Hole, Hub Piloted
ABS	2S1M Anti-Lock Brake System
Drums	Outboard Mount, Cast Steel
Wheels	Steel Disc, 8.25 x 22.5 (12)
Tires	11 R 22.5 G Radial Tires (12)
Brakes	16 1/2" x 7"
Fenders	Front & Rear, 1/4" Synthetic, 7 Degree Slope
Lights	12 Volt LED ICC w/Sealed Harness
Mud Flap	(2) Polyline Anti-Spray Splash Guard w/SmithCo name
Paint	Polyurethane, any combination of gray, white or black Special colors available upon request
Min. Tractor Hydraulic Reqs.	25-30 GPM, 2,600-2,800 PSI, 10 Gallon Reservoir

SX Series Tub Capacities

	34' Tub	36' Tub
Waterfull	23 cu yd	24 cu yd
Heaped	31 cu yd	32 cu yd

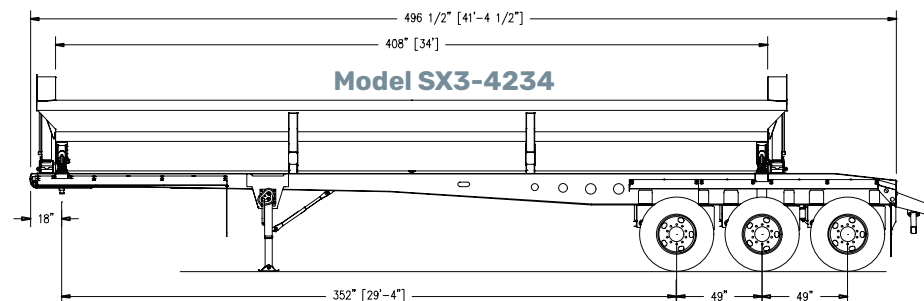

Manufacturer reserves the right to modify designs, materials and specifications without notice.

DISCLAIMER

Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical. Equipment availability, prices and specifications are subject to change without notice.