

# HALE TRAILER BRAKE & WHEEL



Resale Inventory  
A022035  
VIN: 563037

## SALES | RENTALS | PARTS | SERVICE

Allentown, PA:	800-383-8894	Jacksonville, FL:	800-828-3055
Baltimore, MD:	888-601-7500	Little Rock, AR:	833-424-8944
Boston, MA:	800-854-5310	Portland, ME:	800-325-4253
Concord, NC:	800-438-2250	Richmond, VA:	866-839-3495
Delmar, DE:	866-486-1400	Scranton, PA:	800-569-1400
Des Moines, IA:	888-673-5011	Springfield, MA:	800-854-5306
Elkton, MD:	800-544-7127	Voorhees, NJ:	866-315-0235

HaleTrailer.com | @haletrailer     

**800-232-6535** \*FINANCING AVAILABLE

## Infinity Flat 53' Rear Axle Slide (Model: HAICF22RSA)

**Length / Width:** 53 feet x 102 inches

**Suspension Type:** Rear axle slide; This Trailer Design Does NOT Meet Proposed GHG2 Compliance Requirements

**Frame Rating:** 80,000 lbs distributed - 55,000 lbs concentrated in 4 feet- GAWR and tire ratings determine legal payloads

**Flooring:** 1 1/8 inch aluminum with 4 wood nailer strips

**Crossmembers:** 12 inch centers - 4 inch jr. I-steel

**Single Coil Hauling Package:** Included

**Side Rails:** Exclusive **Revolutionary RASR Rail Technology** -- one piece routed aluminum designed for strength and impact

**Chain Cargo Tie Downs:** 17 pair recessed in siderails

**Stake Pockets:** Routed aluminum on 24 inch centers (2 load securement openings between stake pockets)

**Rubrail:** Integrated with siderail

**Main Beams:** 130K load bearing flanges

**Kingpin:** 30 inches

**Loaded Fifth Wheel Height:** 49 inches

**Landing Gear:** OEM Standard with Forward & Rear Bracing

**Knee Braces:** Fabricated on approx. 60 inch C/C

**Bulkhead Pockets:** 4 DOT type bulkhead pockets only - welded to front

**Bulkheads:** Removable steel 4 post DOT type bulkhead - no turnback - 48 inches high with front pockets

**Number of Axles:** 2

**Axle Spindle:** Tapered

**Brakes:** Spring brakes, auto slacks

**Air Line Filters:** (2) Meritor In-line type installed

**ABS:** 4S/2M - no cable or tool

**Axle Spread:** 122 inches open - 54 inches closed - Meets California, Canadian RTAC and BC dimensional specifications in closed

**Hub and Drums:** 10-hole hub-piloted with outboard cast drums

**Wheel Ends:** Grease in hubs - \*\*\* 5-year wheel end warranty \*\*\*

**Wheels:** 22.5 x 8.25 steel disc wheels - pre-painted white - STANDARD

**Tires:** 11R 22.5 14PR OEM standard tires

**Tire Inflation System:** None standard

**Suspension Detail:** Hendrickson AANT23K and AAZNT23K Intraax air ride

**Air Assist Slide Box Pins:** Standard mount of controls on slider frame

**Auto Glad Hand Dump:** Installed

**Electric Dump Valve:** Wired to 7-way auxiliary socket to dump rear axle

**Front Corners:** Tapered steel

**Electrical System:** LED: 3 lights/side, 2 lights/side on rear - STANDARD

**Paint:** Black urethane on steel parts with Infinity decals - STANDARD

**Conspicuity Tape:** Per NHTSA specs - installed in recess on rubrails

**Bumper:** Weld-on type - meets underride requirements - painted steel

**Mudflaps:** 1 set OEM standard behind rear axle only

**Spare Tire Carrier:** None standard

**Winch Track:** Full length integrated double L type aluminum on both sides -- STANDARD

**Sliding Winches:** 12: 6 each side; Sliding Rope Hook/ Winch Strap Hook Retainers -- STANDARD

**27 foot Winch Straps:** None standard

**30 foot Winch Straps:** None standard

**Dock Bumpers:** 1 pair rubber on rear

**Hubodometer:** None standard

**Registration Holder:** Install registration holder - OEM standard

**Tool Box:** None standard

**VIN Plate:** Bilingual US/Canadian VIN plate

**Please Note:** Price includes commodity surcharges

**Unit Numbers & Decals:** Not available

### DISCLAIMER


Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical.

Equipment availability, prices and specifications are subject to change without notice.

THIS DOCUMENT REMAINS PROPERTY OF FONTAINE TRAILER COMPANY. ITS CONTENTS ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE, USE OR DISCLOSE ANY INFORMATION WITHOUT WRITTEN CONSENT FROM FONTAINE TRAILER COMPANY.

FRAME RATINGS	
DISTRIBUTED	80,000
COIL	49,446
60"	52,638
120"	56,336
180"	60,593

NOTE:  
 FRAME RATINGS DENOTE WHAT THE TRAILER FRAME IS CAPABLE OF SUPPORTING. THE SUSPENSION/TIRES MAY NOT BE CAPABLE OF SUPPORTING THESE LOADS WHEN CONCENTRATED OVER THE SUSPENSION AREA. REFER TO THE TRAILER GVWR AND GAWR.

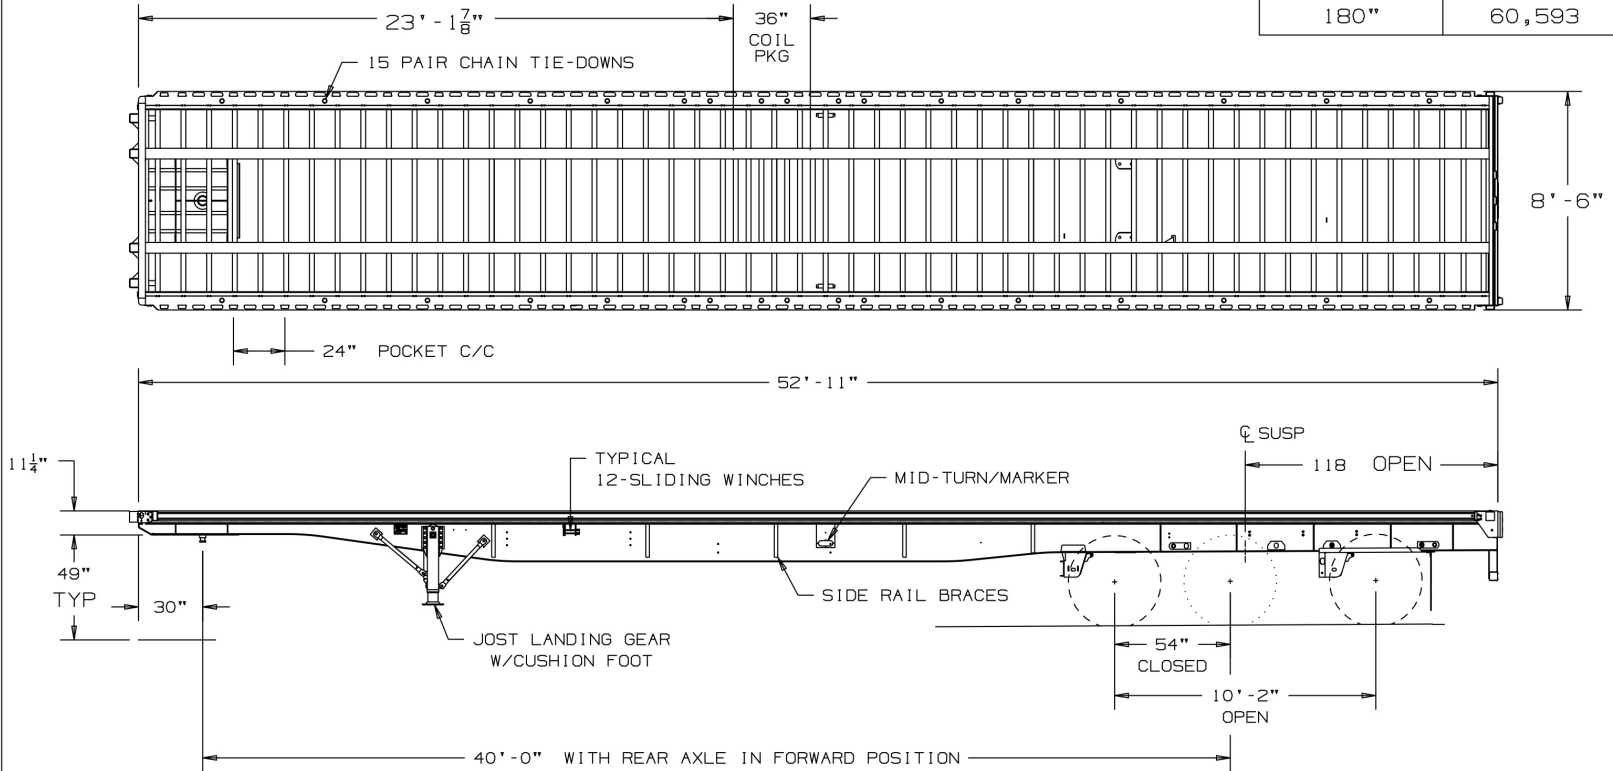

KING PIN HEIGHT RANGE

- 47"
- 48"
- 49" (TYPICAL)
- 50"

DO NOT SCALE DRAWING  
 DIMENSIONS ADHERE TO:  
 ASME Y14.5M-1994

THIRD ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED

FRACTIONS: ± 1/16  
 DECIMALS: ± .06  
 HOLES: ± .01  
 ANGLES: ± 2°

UNITS OF DIMENSION ARE: INCHES

DRAWN BY \* DATE \*

CHECKED BY DATE

APPROVED BY DATE

**FONTAINE TRAILER CO.**  
 HALEYVILLE, AL

TITLE:

HA1CF22RSA

PRINTED OR COPIED DOCUMENT IS UNCONTROLLED DOCUMENT UNLESS STAMPED ORIGINAL

SIZE: A	SCALE: ***	SHEET: 1 OF 1
DRAWING NUMBER 19165-SALES		REV. B