

HALE

TRAILER

BRAKE & WHEEL

GENESIS FRAME DUMP



A034041
VIN: 92936

SALES | RENTALS | PARTS | SERVICE

Allentown, PA:	800-383-8894	Little Rock, AR:	833-424-8944
Baltimore, MD:	888-601-7500	Portland, ME:	800-325-4253
Concord, NC:	800-438-2250	Raleigh, NC:	833-418-9777
Delmar, DE:	866-486-1400	Scranton, PA:	800-569-1400
Des Moines, IA:	888-673-5011	Springfield, MA:	800-854-5306
Elkton, MD:	800-544-7127	Voorhees, NJ:	866-315-0235
Jacksonville, FL:	800-828-3055	Walpole, MA:	800-854-5310

haletrailer.com | @haletrailer     

800-232-6535 *FINANCING AVAILABLE

Length	36' (15)	BODY SPECIFICATIONS		Body	
Width	96" INBOARD	Tarp	NONE	Accessories	NONE
Side Height	64" SOLID	Bow Holders	NONE		
Top Rail	9" DUMP	Tarp Bows	NONE		
Side Mat'l-front	7' - .100 WALL	Tarp Basket	NONE		
-middle	23' - .140 WALL	Tarp Hooks	NONE	TAILGATE	
-rear	6' - .180 WALL	Bulkhead Mat'l	3/16" (15)	Height	FULL - GENESIS (15)
Side Options	NONE	Bulkhead	D/S-MANDOOD (14)	Mat'l Thkness	.140 WALL
Floor Mat'l	1/4" FULL LENGTH	Options	5" SLOPE PLATES	Slope	NONE
Crsmbr Spacing	12"	Body Fenders	14"	Hinges	OVERSLUNG
		Ladders (Out)	D/S-REAR	Side Swing	NONE
		Inside	NONE	Gate Seal	RUBBER
Floor Options	STUB LONGITUDINALS	Shovel Hgr	D/S-FRAME	Safety Latch	ONE EACH SIDE
Tailgate Control	AIR / FRAME + ELEC CC (4)	Light Panel	FULL - LED; X=LED B/U LIGHTS	Coal/Grain Door	NONE
Body Pkg	NONE	Options	OOOX ooo XOOO	Coal Chute	NONE
Options		Marker Lights	LED - 14 PR TOP & BOTTOM	Gate Options	REMARK (9)
Vibrator	NONE	MMTS	BELOW RAIL - OVAL LED		
Mudflaps	STD + ACROSS REAR (1)	Apron	NONE		


CHASSIS SPECIFICATIONS

Model	TRIAxLE-1 FIXED-FRONT 2 LIFT	ABS	2S / 1M	Tire Carrier	NONE
Beam Mat'l	ALUMINUM			Landing Gear	2 SPEED JOST AX150 D/S CRANK
Length	36' 6"	Independ. Susp(s)	NONE	Chassis Lights	NONE
Width	96"	Distance:		Elec Coupler	7 WAY + 4 WAY
Hoist	85-285 (2)(11)	From:		Hyd Tank	NONE
Chassis Neck	STD + 12"	Controls		Hyd Hose Fitting	WINGNUT
King Pin Setting	18"	Location		Hyd Hose Length	108"
5th Whl Plate	3/8" W/ 3/8"X 3" X 7" MOUNT	Axle(s)		Tow Hooks	TWO-ONE EACH SIDE
5th Whl Ht	50"	Accessories		Paint	BLACK SOFTCOAT
Overhang	6"			Chassis	CHASSIS REAR CM: TAPERED
Rear Axle Setting	21.5"	Brakes		Options:	W/ DIAMOND PLATE COVER
K/P To Rear Axle	398.5" (16)	Drums			REMARK (12)(13)
Suspension	AAT30K / E3-L(LIFT)-E2-1 (3)(5)	Hubs			
Susp Control	FRAME + ELEC CC (4)(10)	Wheels			
Susp Spacing	52" - 52" (6)	Tires			
Susp Options	GALVANIZED HANGERS				
Springs	AIR				
Axles	TP				
Accessories	NONE				
Brakes	HENDRICKSON MAXX 22T				
Drums	N/A				
Hubs	10 STUD STEEL				
	W/ HXL-5; GREASED HUBS				
Wheels	8.25 x 24.5 6 HP/ 6 MP				
Tires	11R 24.5 R268 16 PLY BS (10)				

REMARKS:

WEIGHT: 14,730

1. BLACK RUBBER FLAP AHEAD OF AXLE #1 IN THE CENTER.-MUDFLAP 4" FORWARD OF STANDARD POSITION.
 2. REMOTE GREASE ZERK FROM TOP PIN TO BOTTOM D/S FACING FORWARD.
 3. RIGHT WEIGH OIL FILLED GAUGE (LBS.)(FLUSH MOUNT) ON FRONT CHASSIS CROSSMEMBER.
 4. WIRED TO AUXILIARY 4 WAY PLUG-SEE DIAGRAM BELOW
 5. HEIGHT CONTROL VALVE ON AXLE #3.
 6. LIFT AXLES TO BE CONTROLLED THROUGH FRAME SWITCHES & ELEC CC (WIRED TO AUX. PLUG) AND TO HAVE BRAKE RELEASE (LIFT AXLE TO SPIN FREELY) FOR EACH LIFT AXLE (LIFT INDEPENDENTLY).
 7. ALL FRAME SWITCHES TO BE IN A BOX ON D/S NEAR LANDING GEAR. **** OLD STYLE BOX NOT AIR IN A BOX ****
 8. PLASTIC INSULATORS BETWEEN WHEEL/DRUM & WHEEL/HUB ALL AXLES.
 9. REMOTE GREASE ZERKS FOR LATCH BAR
10. TIREMAXX PRO INFLATION SYSTEM ON ALL THREE AXLES
 11. NO ACCESS ON OUTSIDE OF BULKHEAD OR FLAP, ACCESS ONLY ON DOGHOUSE IN INSIDE.
 12. HINGE SHOE GREASE ZERKS-REMOTE ZERKS TO D/S MANIFOLD
 13. REAR PIN BUSHING LUBE-REMOTE GREASE ZERKS
 14. NO MANDOR STEP DUE TO FENDER UNDER MANDOR
 15. ALL EAST LOGOS TO BE DECALS ONLY- NOT RIVETTED OR WELDED
 16. MAXIMUM AMOUNT OF CLEARANCE ON LIFT AXLES.
 17. RUN BACKUP LIGHTS WIRING TO JUNCTION BOX BUT DO NOT CONNECT

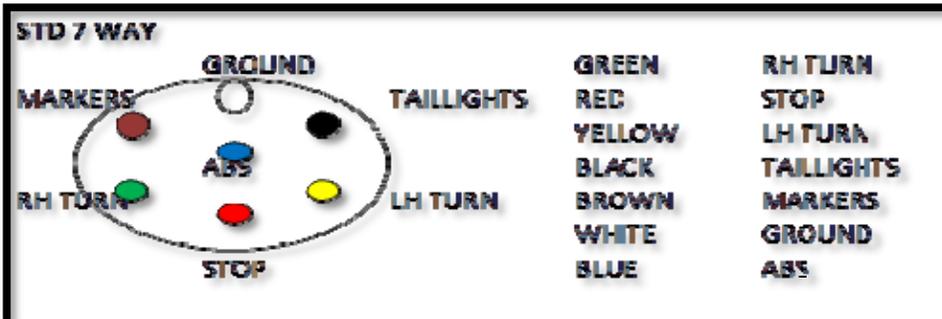

DISCLAIMER

Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical. Equipment availability, prices and specifications are subject to change without notice.