



A038295
VIN: 582309

SALES RENTALS PARTS SERVICE			
Allentown, PA:	800-383-8894	Little Rock, AR:	833-424-8944
Baltimore, MD:	888-601-7500	Portland, ME:	800-325-4253
Concord, NC:	800-438-2250	Raleigh, NC:	833-418-8777
Delmar, DE:	866-486-1400	Scranton, PA:	800-569-1400
Des Moines, IA:	888-673-5011	Springfield, MA:	800-854-5306
Elkton, MD:	800-544-7127	Voorhees, NJ:	866-315-0235
Jacksonville, FL:	800-828-3055	Walpole, MA:	800-854-5310
haletrailer.com @haletrailer			
800-232-6535 *FINANCING AVAILABLE			

Velocity Drop Deck 48' Wide Spread Air
(Model Code: HAVSD12WSA)

Overall Length: 48 feet x 102 inches		
Suspension Type: Wide spread air		
Deck Lengths: 10 feet front and 38 feet rear		
Frame Rating: 80,000 lbs distributed - GAWR and tire ratings determine legal payloads		
Rear Deck Height: 40 inches - loaded		
Flooring: 1 1/8 inch wood		
Crossmembers: 18 inch centers front deck / 12 inch centers rear deck - 4 inch jr. I-steel		
Side Rails: 6 inch structural channel @ 6.5 lbs/ft		
Stake Pockets: 3/16 inch steel on 24 inch centers		
Pipe Spools: Double between stake pockets		
Rubrail: 3/8 inch x 2 1/2 inch steel		
Main Beams: 130K load bearing flanges		
Kingpin: 18 inches		
Loaded Fifth Wheel Height: 49 inches		
Landing Gear: OEM standard		
Knee Braces: Fabricated on approx. 60 inch C/C		
Bulkheads: None standard		
Bulkhead Pockets: 4 - F-5 DOT-type steel		
Number of Axles: 2		
Axle Spindle: Tapered		
Brakes: Spring brakes, auto slacks		
Air Line Filters: (2) Meritor In-line type installed		
ABS: 4S/2M - no cable or tool		
Axle Spread: 122 inches - set at rear		
Hub and Drums: 10-hole hub-piloted with outboard cast drums		
Wheel Ends: Grease in hubs - *** 5-year wheel end warranty ***		
Wheels: 22.5 x 8.25 steel disc wheels - pre-painted white - STANDARD		
Tires: 255/70R 22.5 16PR OEM standard		
Tire Inflation System: None standard		
Suspension Detail: AANL23K Intraax air ride		
Auto Glad Hand Dump : Installed		
Electric Dump Valve: Wired to 7-way auxiliary socket to dump rear axle		
Air Lift: None Standard		
Front Corners: Tapered		
Electrical System: LED: 3 lights/side, 3 lights/side on rear - STANDARD		
Paint: Black urethane with Velocity decals - STANDARD		
Conspicuity Tape: Per NHTSA specs - installed on rubrails		
Bumper: Weld-on type - meets underride requirements		
Mudflaps: 2 sets OEM standard; Spring loaded brackets behind front axle		
Winch Track: Steel on road side: 8-foot front deck and full length on rear deck where possible		
Sliding Winches: 12 standard: 2 front deck and 10 rear deck		
27 foot Winch Straps: None standard		
30 foot Winch Straps: None standard		
Dock Bumpers: 1 pair rubber on rear		
Spare Tire Carrier: 1 standard - mounted between lower gooseneck beams		
Hubodometer: None standard		
Registration Holder: Install registration holder - OEM standard		
Tool Box: None standard		
VIN Plate: Bilingual US/Canadian VIN plate		
Unit Numbers & Decals: Not installed		
DISCLAIMER	Estimated Weight (lbs) (+/- 3%)	11,495

Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical.
Equipment availability, prices and specifications are subject to change without notice.

THIS DOCUMENT REMAINS PROPERTY OF FONTAINE TRAILER COMPANY. ITS CONTENTS ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE, USE OR DISCLOSE ANY INFORMATION WITHOUT WRITTEN CONSENT FROM FONTAINE TRAILER COMPANY.

NOTE:


FRAME RATINGS DENOTE WHAT THE TRAILER FRAME IS CAPABLE OF SUPPORTING. THE SUSPENSION/TIRES MAY NOT BE CAPABLE OF SUPPORTING THESE LOADS WHEN CONCENTRATED OVER THE SUSPENSION AREA. REFER TO THE TRAILER GWR AND GAWR.

FRAME RATINGS


DISTRIBUTED	80,000
COIL	51,487
60"	54,868
120"	58,014
180"	63,702

FLOOR SILLS

18" TYP.
12" TYP.

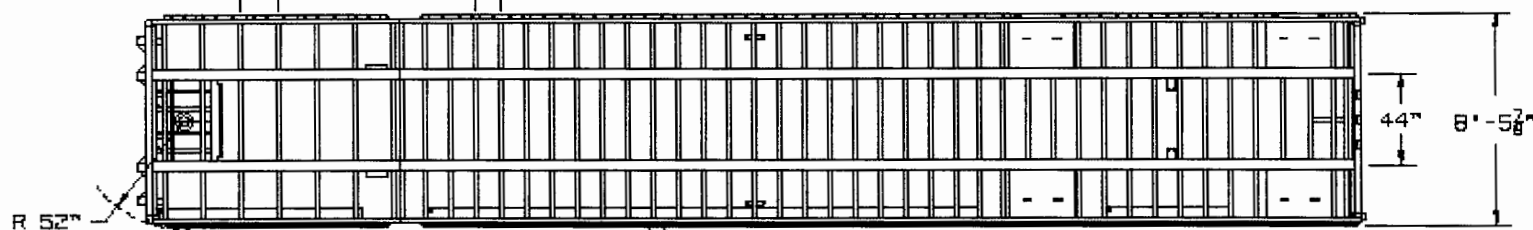


STAKE POCKETS 24" TYP.
DOUBLE PIPE SPOOL BETWEEN POCKETS

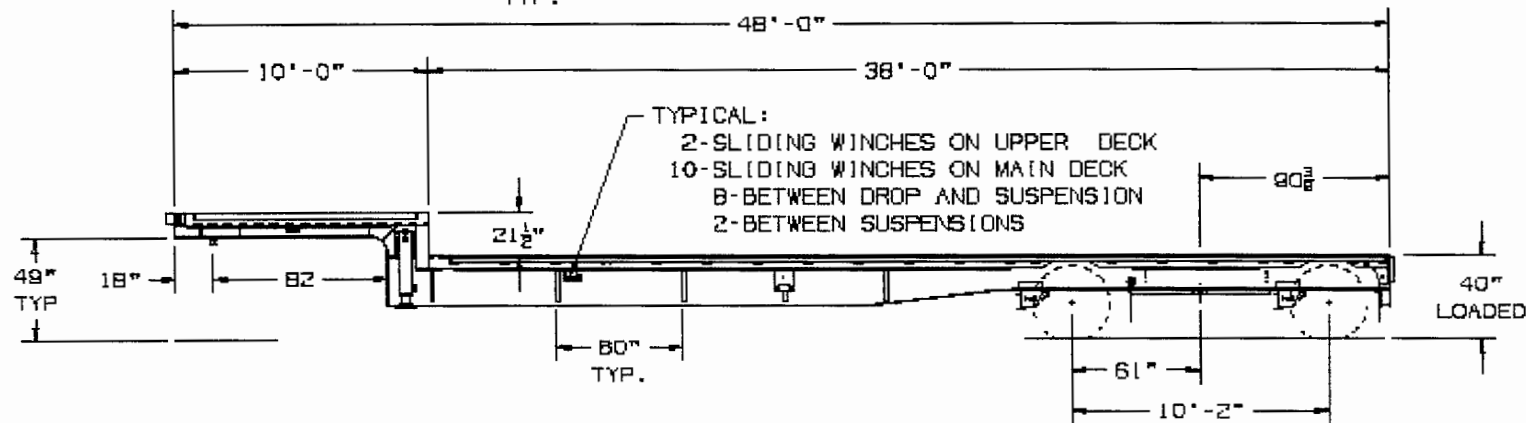

TYPICAL:
2-SLIDING WINCHES ON UPPER DECK
10-SLIDING WINCHES ON MAIN DECK
8-BETWEEN DROP AND SUSPENSION
2-BETWEEN SUSPENSIONS

KING PIN HEIGHT RANGE

47"
48"
49" (TYPICAL)
50"



TOLERANCES
UNLESS OTHERWISE
SPECIFIED
FRACTIONS: $\pm \frac{1}{16}$
DECIMALS: $\pm .08$
HOLES: $\pm .006$
ANGLES: $\pm 2^\circ$
UNITS OF DIMENSION ARE:
INCHES

DRAWN BY
DATE
CHECKED BY
DATE
APPROVED BY
DATE

FONTAINE TRAILER CO.
HALEYVILLE, AL
TITLE
HAVSD12WSA

PRINTED OR COPIED DOCUMENT
IS UNCONTROLLED DOCUMENT
UNLESS STAMPED ORIGINAL
SIZE: A SCALE: *** SHEET: 1 OF 1
DRAWING NUMBER: 18358-SALES REV: T