



Hale Trailer Brake & Wheel

A013225-A013230

VINS: 63032-63037



Infinity Flat 53' Rear Axle Slide (Model: HAICF22RSA)

Length / Width: 53 feet x 102 inches

Suspension Type: Rear axle slide; This Trailer Design Does NOT Meet Proposed GHG2 Compliance Requirements

Frame Rating: 80,000 lbs distributed - 55,000 lbs concentrated in 4 feet- GAWR and tire ratings determine legal payloads

Flooring: 1 1/8 inch aluminum with 4 wood nailer strips

Crossmembers: 12 inch centers - 4 inch jr. I-steel

Single Coil Hauling Package: Included

Side Rails: Exclusive **Revolutionary RASR Rail Technology** -- one piece routed aluminum designed for strength and impact

Chain Cargo Tie Downs: 17 pair recessed in siderails

Stake Pockets: Routed aluminum on 24 inch centers (2 load securement openings between stake pockets)

Rubrail: Integrated with siderail

Main Beams: 130K load bearing flanges

Kingpin: 30 inches

Loaded Fifth Wheel Height: 49 inches

Landing Gear: OEM Standard with Forward & Rear Bracing

Knee Braces: Fabricated on approx. 60 inch C/C

Bulkhead Pockets: 4 DOT type bulkhead pockets only - welded to front

Bulkheads: Removable steel 4 post DOT type bulkhead - no turnback - 48 inches high with front pockets

Number of Axles: 2

Axle Spindle: Tapered

Brakes: Spring brakes, auto slacks

Air Line Filters: (2) Meritor In-line type installed

ABS: 4S/2M - no cable or tool

Axle Spread: 122 inches open - 54 inches closed - Meets California, Canadian RTAC and BC dimensional specifications in closed

Hub and Drums: 10-hole hub-piloted with outboard cast drums

Wheel Ends: Grease in hubs - *** 5-year wheel end warranty ***

Wheels: 22.5 x 8.25 steel disc wheels - pre-painted white - STANDARD

Tires: 11R 22.5 14PR OEM standard tires

Tire Inflation System: None standard

Suspension Detail: Hendrickson AANT23K and AAZNT23K Intraax air ride

Air Assist Slide Box Pins: Standard mount of controls on slider frame

Auto Glad Hand Dump: Installed

Electric Dump Valve: Wired to 7-way auxiliary socket to dump rear axle

Front Corners: Tapered steel

Electrical System: LED: 3 lights/side, 2 lights/side on rear - STANDARD

Paint: Black urethane on steel parts with Infinity decals - STANDARD

Conspicuity Tape: Per NHTSA specs - installed in recess on rubrails

Bumper: Weld-on type - meets underride requirements - painted steel

Mudflaps: 1 set OEM standard behind rear axle only

Spare Tire Carrier: None standard

Winch Track: Full length integrated double L type aluminum on both sides -- STANDARD

Sliding Winches: 12: 6 each side; sliding Rope Hook/ Winch Strap Hook Retainers -- STANDARD

27 foot Winch Straps: None standard

30 foot Winch Straps: None standard

Dock Bumpers: 1 pair rubber on rear

Hubodometer: None standard

Registration Holder: Install registration holder - OEM standard

Tool Box: None standard

VIN Plate: Bilingual US/Canadian VIN plate

Please Note: Price includes commodity surcharges

Unit Numbers & Decals: Not available

DISCLAIMER


Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical.

Equipment availability, prices and specifications are subject to change without notice.

THIS DOCUMENT REMAINS PROPERTY OF FONTAINE TRAILER COMPANY. ITS CONTENTS ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE, USE OR DISCLOSE ANY INFORMATION WITHOUT WRITTEN CONSENT FROM FONTAINE TRAILER COMPANY.

FRAME RATINGS	
DISTRIBUTED	80,000
COIL	49,446
60"	52,638
120"	56,336
180"	60,593

NOTE:
 FRAME RATINGS DENOTE WHAT THE TRAILER FRAME IS CAPABLE OF SUPPORTING. THE SUSPENSION/TIRES MAY NOT BE CAPABLE OF SUPPORTING THESE LOADS WHEN CONCENTRATED OVER THE SUSPENSION AREA. REFER TO THE TRAILER GVWR AND GAWR.

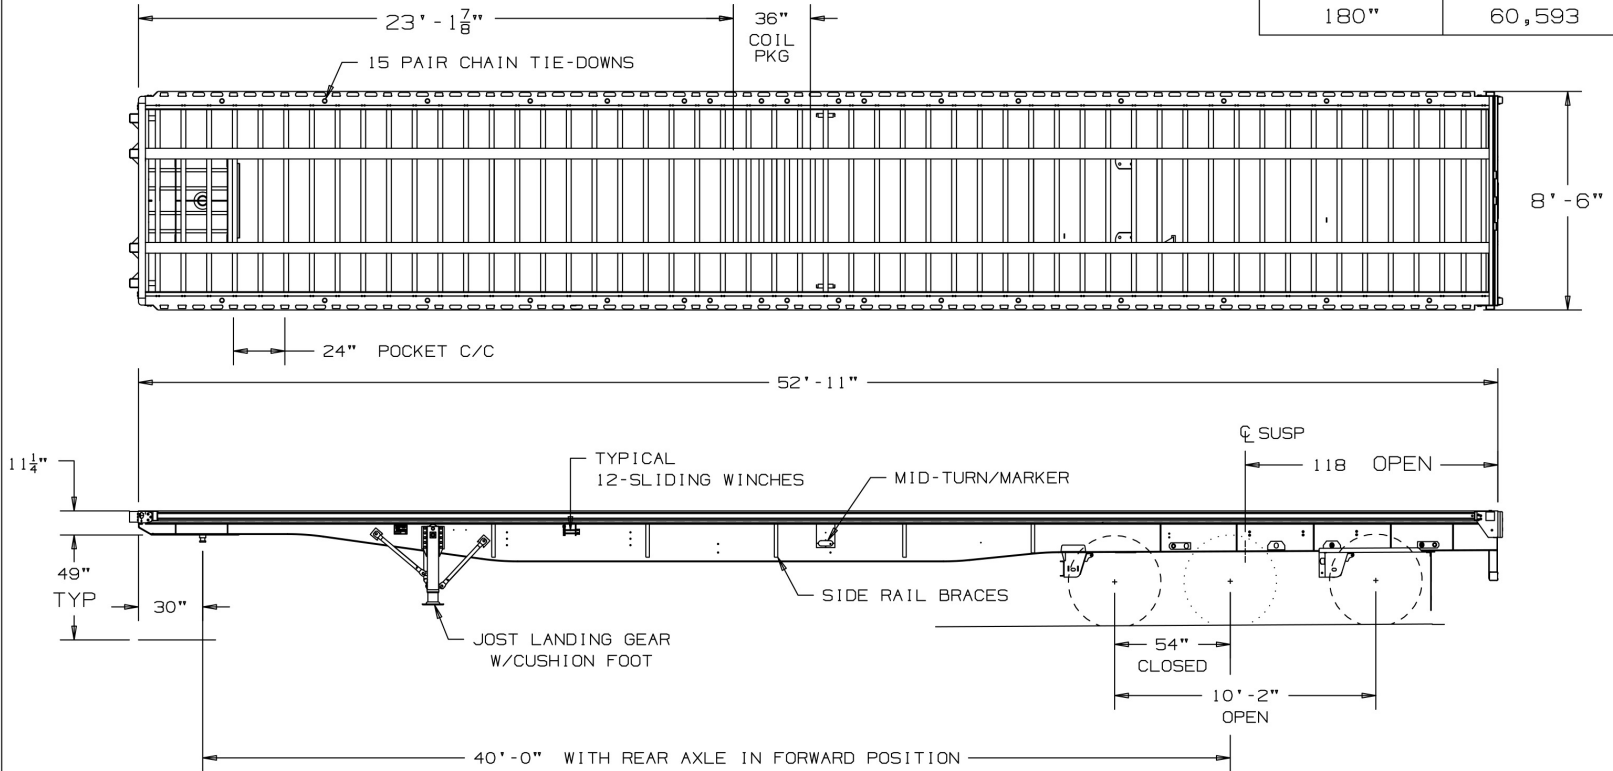

KING PIN HEIGHT RANGE

- 47"
- 48"
- 49" (TYPICAL)
- 50"

DO NOT SCALE DRAWING
 DIMENSIONS ADHERE TO:
 ASME Y14.5M-1994

THIRD ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED

FRACTIONS: ± 1/16
 DECIMALS: ± .06
 HOLES: ± .01
 ANGLES: ± 2°

UNITS OF DIMENSION ARE: INCHES

DRAWN BY * DATE *

CHECKED BY DATE

APPROVED BY DATE

FONTAINE TRAILER CO.
 HALEYVILLE, AL

TITLE: HA1CF22RSA

PRINTED OR COPIED DOCUMENT IS UNCONTROLLED DOCUMENT UNLESS STAMPED ORIGINAL

SIZE: A	SCALE: ***	SHEET: 1 OF 1
DRAWING NUMBER: 19165-SALES		REV. B