

ALUMINUM "BST" PLATFORM TRAILER

LENGTH:	48'	SUSPENSION:		AAT30K/E2-L-LIFT (FRONT LIFT)
WIDTH:	102"			GALVANIZED HANGERS & SOFTCOAT PAINT
NOSE:	SQUARE + EXTRA ISO 7 WAY PLUG (1)(3)	LOWERING KIT:		AUTOMATIC
		AXLE TO AX	LE:	121"
KING PIN SETTING:	30" W/ 5/16" STEEL-NO ACCESS HOLES	AXLE TO REAR:		30"
FLOOR:	KNURLEDALUMINUM	LIFT / AXLE:		N/A
	3 NAILERS	SPACI	ING:	N/A
	INTEGRATED SIDE RAIL	F.W. HEIGHT:		49"
XMEMBER SPACING:	16"	CONTROLS:		FRAME SWITCH+ELEC CC WIRED TO BLACK AUX
COIL PACKAGE:	YES	AXLES:		TP
SPOOLS:	DOUBLE			23,000 GAWR
POCKETS:	HD FRONT TO ACCEPT AERO BH-SEE DWG	AUTO SLACKS:		TSE
ROPE HOOKS:	NONE	BRAKES:		16 1/2" X 7"
		ABS SYSTEM	VI:	4S/2M
TIE DOWNS:	10 PR J-HOOKS&2 STORAGE PIPES/D/S LG			
MARKER LIGHTS:	LED - 9 PR EACH SIDE ON RAIL- EVENLY	HUBS:		10 STUD LW STEEL
MID TURN SIGNAL:	LED- COMBO MARKER / MMTS BELOW RAIL	DRUMS:		LWBD
FLAP ANGLED		WHEELS:		8.25 X 22.5 4HP / 4 MP
LIGHT PANEL:	LED - 11 LIGHTS (000X 000 X000) (6) 1/2 STEPS ON REAR			
	FULL WIDTH BUMPER	TIRES:	***************************************	11R 22.5 R196A BS
BULKHEAD:	NONE	LANDING GE	EAR:	JOST AX150 D/S CRANK
TYPE:				FORWARD BRACING (2)
HEIGHT:		TIRE CARRIER:		BRACKETS ONLY - P/S ACCESS MID TRAILER
RETURNS:		TOOLBOX:	QTY:	ONE-AERO EXTREME 1/8"
MAT	'L:		SIZE:	24" X 24" X 60"
ACCENT TAPE:	EAST BLACK		LOCATION:	D/S-BETWEEN AXLES
PAINT:	EAST BLACK SOFT COAT BLACK ON SUSPENSION		MAT'L:	AERO DOUBLE DOOR-SMOOTH ALUM
WINCH TRACK:	STANDARD INTEGRATED RAIL	MUDFLAPS:		STD
		TYPE:		SILVER PLASTIC
LOCATION:		LOCATION:		REAR
WINCHES:	12 - EA. STEEL SLIDING - D/S			
WINCH CLIPS:	12 - EA. SLIDING CLIPS - P/S			
STRAPS:	NONE			

REMARKS: PRICE SUBJECT TO CHANGE 12 WEEKS PRIOR TO ESTIMATED BUILD TIME WEIGHT: +/-3%: 9704

1. EXTRA ISO 7 WAY PLUG WIRED TO JUNCTION BOX D/S INSIDE FRAME IN FRONT OF MOST FORWARD AXLE. CHANGE 1


2. TRUCKLITE REGISTRATION HOLDER D/S @ LANDING GEAR

3. WIRING BACK 3" FROM INSIDE NOSE - SEE PICTURE

4. DUNNAGE RACK 8' 3" (090-30200-02) LOCATED D/S AHEAD OF SUSPENSION - PIC BELOW

5. PREP FOR FUTURE TIRE MAAX PRO INFLATION SYSTEM ON BOTH AXLES.

6. X=LED BACK UP LIGHTS WIRED TO AUXILIARY PLUG BROWN WIRE

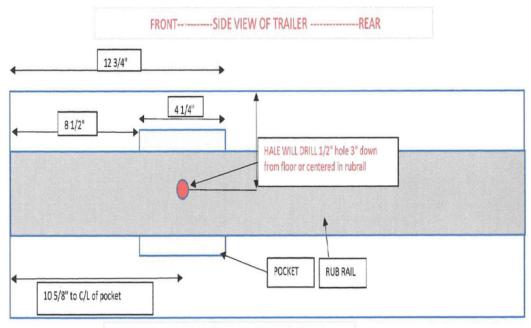

ELECTRICAL HARNESS TO BE BELOW OR ABOVE 1/2" HOLE



