



Hale Trailer Brake & Wheel

069308



ALUMINUM "BST-II" PLATFORM TRAILER

LENGTH:	48'	SUSPENSION:	AAT25K / E2-1 w / "K" BRACING Galvanized Hangers & Soft Coat Paint
WIDTH:	102" (1)	LOWERING KIT:	AUTOMATIC
NOSE:	SQUARE + EXTRA 6-WAY CONNECTOR (1) (3)	AXLE TO AXLE:	121"
KING PIN SETTING:	30" - 5/16" PLATE	AXLE TO REAR:	30"
FLOOR:	KNURLED 3 NAILERS INTEGRATED RAIL	LIFT / AXLE:	NONE
XMEMBER SPACING:	16"	SPACING:	
COIL PACKAGE:	YES - 8 PCS BAR INSERTS	F.W. HEIGHT:	49"
SPOOLS:	DOUBLE	CONTROLS:	
POCKETS:	HD FRONT TO ACCEPT AERO BH SEE DWG	AXLES:	TP SPINDLES - 23,000 # RATING
ROPE HOOKS:	NONE	AUTO SLACKS:	STD
TIE DOWNS:	10 PR J-HOOKS + Storage Two D/S @ LG	BRAKES:	16-1/2" x 7"
MARKER LIGHTS:	LED - 6 EACH SIDE ON RAIL + MID TURN SIGNAL: LED COMBO MARKER / MMTS BELOW RAIL	ABS SYSTEM:	4S / 2M
LIGHT PANEL:	LED - STD 9 LIGHTS 000 000 000 1/2 STEPS ON REAR FULL WIDTH BUMPER	HUBS:	10 STUD LWSTEEL / LW DRUMS LIGHTWEIGHT BRAKE DRUMS
BULKHEAD:	TYPE: NONE HEIGHT: RETURNS: MAT'L:	WHEELS:	8.25 x 24.5 ALUMINUM 4 CLEAN BUFF / 4 POLISHED
ACCENT TAPE:	BLACK	TIRES:	11R 24.5 GENERAL RA 16PLY
PAINT:	BLACK SOFT COAT BLACK SOFT COAT ON SUSPENSIONS	LANDING GEAR:	2 SPEED JOST ALUMINUM AX150 D/S CRANK (2) FORWARD BRACING
WINCH TRACK:	INTEGRATED BOTH SIDES	TIRE CARRIER:	MTNG BRKTS ONLY MID TRAILER- P/S ACCESS
LOCATION:		TOOLBOX: QTY:	ONE
WINCHES:	12 STEEL SLIDING - D/S	SIZE:	24" x 24" x 60"
WINCH CLIPS:	12 ALUM SLIDING - P/S	LOCATION:	D/S BETWEEN AXLES
STRAPS:	NONE	MAT'L:	AERO DOUBLE DOOR - SMOOTH SHEET LO-MOUNT FOR WINCH CLEARANCE
		MUDFLAPS:	STD
		TYPE:	SILVER PLASTIC
		LOCATION:	ON REAR

REMARKS: USE STD EAST FLAPS/LOGOS-NOT 50TH ANNIVERSARY FLAPS/LOGOS.

- EXTRA 6-WAY WIRED TO JUNCTION BOX D/S INSIDE FRAME IN FRONT OF MOST FORWARD AXLE
- TRUCKLITE REGISTRATION HOLDER D/S AT LANDING GEAR
- (3) WIRING BACK 3" FROM INSIDE NOSE - SEE PICTURE


WEIGHT: 9580

CHANGE 1

DISCLAIMER

Specifications are believed to be correct, but may contain errors and/or omissions. Photographs are the representative of the subject equipment but may not be identical. Equipment availability, prices and specifications are subject to change without notice.

FRONT-----SIDE VIEW OF TRAILER -----REAR

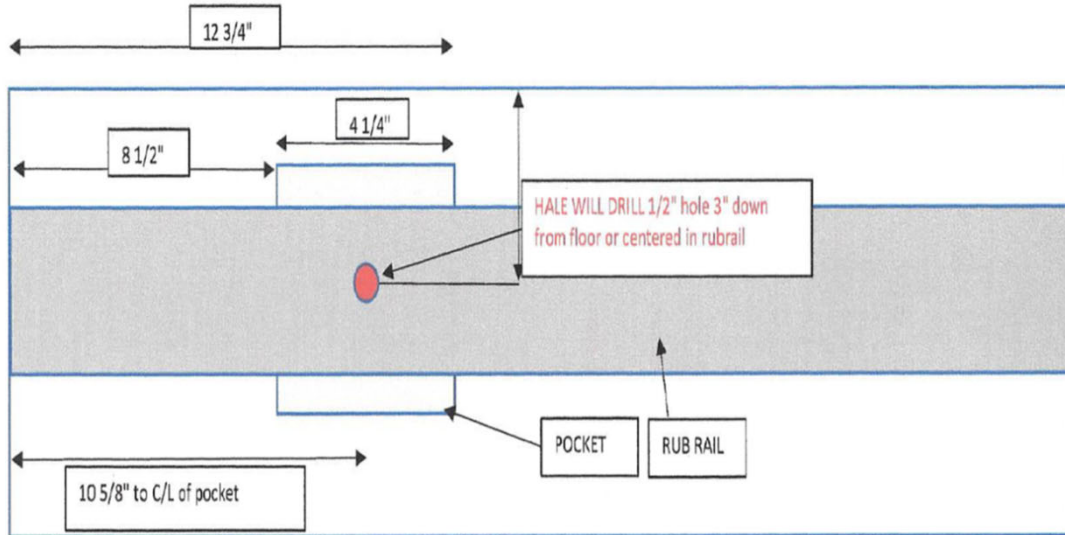

ELECTRICAL HARNESS TO BE BELOW OR ABOVE 1/2" HOLE



WIRING HARNESS TO BE LOCATED 3" REARWARD OF INSIDE 90 DEGREE ANGLE (STANDARD LOCATION OF HARNESS) ALL THE WAY ACROSS THE FRONT OF THE TRAILER


Hale Trailer
X J. Jones 4/25/18
X

SIZE	DRAWING NO.	SHEET	REV
A	0610-4810210-2	1	A

- NOTES:
- DO NOT SCALE DRAWING.
 - REMOVE ALL BURRS AND SHARP EDGES.
 - INDUSTRY STANDARDS AND PRACTICES MUST BE APPLIED IN FABRICATION OF PARTS.
 - PART TO BE FREE FROM SURFACE IMPERFECTIONS OTHER THAN SURFACE FINISH REQUIREMENTS.
 - CRITICAL DIMENSIONS ARE INDICATED BY ●
 - THIS DRAWING WAS ORIGINATED BY AND IS THE EXCLUSIVE PROPERTY OF AERO INDUSTRIES, INC. AND/OR ITS OWNER. IT IS NOT AN AUTHORIZATION OR LICENSE TO MAKE THIS CONSTRUCTION OR TO FURNISH THIS INFORMATION TO OTHER PARTIES.

OUT SIDE VIEW 101" 21/32" OD

INSIDE VIEW



97.375 IN SIDE LEG TO IN SIDE LEG

7	0611-960125	LEG ASSY BULKHEAD ALUM P.S	1
6	0611-960126	LEG ASSY BULKHEAD ALUM D.S	1
5	0611-860132	GUSSET BULKHEAD DOT	4
4	TOP RAIL ASSY 102W		1
3	BOTTOM RAIL ASSY 102W		1
2	860159		1
ITEM	PART NUMBER	DESCRIPTION	QTY

REV	DESCRIPTION	BY	DATE
REVISIONS			

TOLERANCES UNLESS OTHERWISE SPECIFIED	MATERIAL NOTE
DIMENSIONS IN INCHES	
∅ = ± .016	
∅ = ± .011	
.∅ = ± .020	
.∅∅ = ± .010	
.∅∅∅ = ± .005	
ANGLE = ± 12°	
SURFACE = 125/	
USED ON	MATERIAL FINISH

P:\INVENTOR 2012\0610\0610-4810210-2.idw

TITLE: BULKHEAD ALUM 48"x102" 10" WRAP

SCALE: 1:1	DRAWN BY: MJB	APPROVED BY:	DATE: 8/28/2017
SIZE: A	DRAWING NO: 0610-4810210-2	SHEET OF: 1	REV: A