



Resale Inventory
A020234
VIN: 5A2599

SALES | RENTALS | PARTS | SERVICE

Allentown, PA: 800-383-8894	Jacksonville, FL: 800-828-3055
Baltimore, MD: 888-601-7500	Little Rock, AR: 833-424-8944
Boston, MA: 800-854-5310	Portland, ME: 800-325-4253
Concord, NC: 800-438-2250	Richmond, VA: 866-839-3495
Delmar, DE: 866-486-1400	Scranton, PA: 800-569-1400
Des Moines, IA: 888-673-5011	Springfield, MA: 800-854-5306
Elkton, MD: 800-544-7127	Voorhees, NJ: 866-315-0235

HaleTrailer.com | @haletrailer

800-232-6535 *FINANCING AVAILABLE

WORKHORSE 55LCC FLD 26 (Model: WKH55LCC*F*826543)

Detailed Specifications		General	
SKU	WKH55LCC*F*826543		
Capacity	55 Tons in 13-foot Length with 4 Axles Close Coupled - GAWR and GVWR Determine Legal Loads		
Length (Trailer Only)	52 feet 10 inches		
Width	8 feet 6 inches		
Compatibility	Designed to Accept Optional 51/60 Rear Axle		
Accent Package	None		
Weight	Est. Configured Weight: 21830# +/- 3%		
Gooseneck			
Gooseneck Design	Narrow Hydraulic Removable Non-Ground Bearing - Swing Radius of 108 inches (12ft 7in overall Gooseneck Length) Set Up for Wetline Operation		
Loaded Fifth Wheel Height	Dual Cam Pawl Arm Assembly with 7 ride height positions (50 inches nominal)		
Kingpin	Removable kingpin at 89 and 108 inch radius		
Power Source	Set Up for Wet Line Operation		
Hydraulic Fittings	OEM Standard 1/2 inch		
VIN Plate	Bilingual VIN Plate		
Registration/Document Holder	Install Registration/Document Holder		
Deck			
Framework	All Main Longitudinal Members Fabricated with 100,000# Minimum Yield Steel Flanges with 50,000# Webs		
Deck Design	Flat Level Deck Design		
Deck Length	26 feet 0 inches Clear Deck Length		
Loaded Deck Height	18 inches with 6 inches Ground Clearance		
Crossmembers	23 1/4 inch		
Flooring	2 inch Nominal Wood (Side Rails Only)		
Front Ramps	Manual Front Approach Ramps Included		
Extension Brackets	13 pair - 26 Total Removable Swing Type, 2 Pair - 4 Total Heavy Duty Removable Hook-On Type		
Toolbox	2 Fully Covered Trays in Front of Deck Between Mainbeams with Lockable Covers		
Hammer Plate	Hammer Plate Installed Over Recessed Crossmembers. Perforated Plate Under Hammer Plate Forming Two Storage Areas. 2 Pair of Lashing Rings Located in Last Two Deck Sections		
Rear Bridge: General			
Front Bogie Ramp	Included		
Boom Trough	V Crossmembers with Bolt-In V Pan		
Deck to Bogie Connection	Fixed		
Bolsters	Recessed		
Covered Rear Bogie	None		
Rear Bogie Height	40 7/8 inches to Top Flanges - 36 5/8 inches to Top of Bolsters		
Connections for Future Axle Attachment	Air and Electrical Connections to Go Along with Connecting Ears		
Rear Bridge: Axles			
Number of Axles	3 Axles		
Axle Capacity	25,000 lb. Nominal Capacity Per Axle NOTE: GAWR Determined by Suspension Type, Brakes, Tires and Other Components.		
Axle Spread	54.5 inches (Between Axles)		
Brakes	16.5 inches x 7 inches with 5.5 inches Autoslacks - Heavy Duty Brake Drums - Outboard Mount		
Spring Brakes	None		
Dust Shield	None		
Hubodometer	None		
Rear Bridge: Suspension			
Suspension	Air Ride		
ABS	None		
Third Lift Axle	Air Lift Installed on Third Axle		
Chain Lift	None		
Ride Height Control	7-Position Mechanical Ride Height Control System		
Manual Dump Valve	Manual Dump Valve (Push Pull)		
Liquid Filled Gauge	None		
Load Scale	None		
Wheels and Tires			
Wheels	8.25 x 22.5 LvL One Buffed Outside/Steel Inside - Hub-Piloted		
Tires	275/70R 22.5 H Ply OEM Standard		
Inflation	None		

Detailed Specifications

Lighting

Electrical System	DOT Sealed Beam and Harness with LED Lights and 4-inch Flush Mounted Battery Powered Amber Strobes
Tail Lights	3 Tail Light Package
Marker Lights	3 Marker Lights Per Side Including Mid-Turn
Electrical Receptacle	J560 7-Pin Connector

Paint

Paint	Fontaine Black Polyurethane Enamel
-------	------------------------------------

Miscellaneous

Lash Rings	19 Pair - 38 Total
Flag Holders	2 Pair Flag Holders

Additional Options




Accent Package Installed on Flip Box	None
Accent Package Installed on Rigid Spreader	None
Flip Axle	None
Dust Shields on Flip Axle	None
Accent Package Installed on Flip Axle	None

WORKHORSE 55LCC FLD 26



DISCLAIMER

Specifications are for the equipment at the time it was produced and may not accurately reflect its current condition. Photographs are the representative of the subject equipment but may not be identical. Equipment availability, prices and specifications are subject to change without notice.

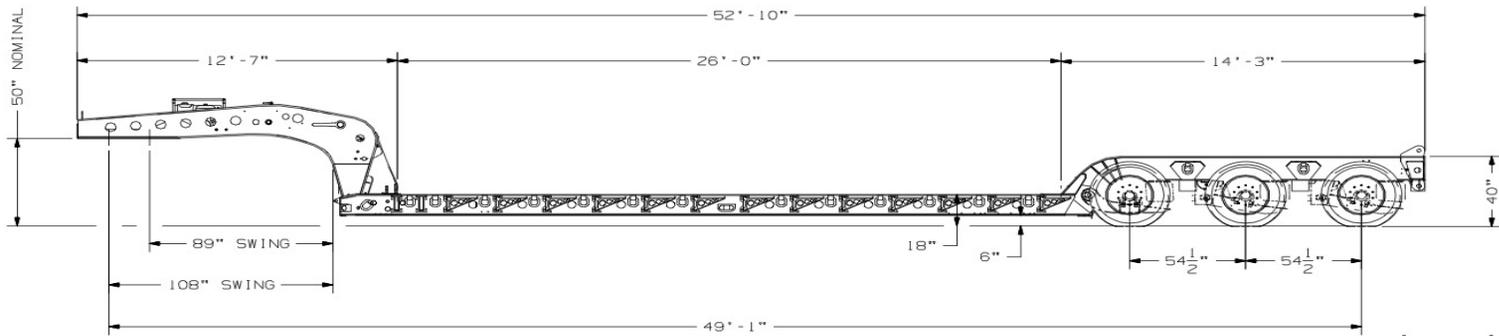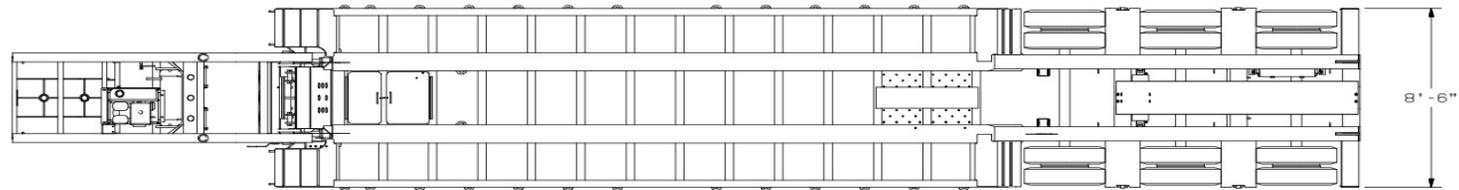

OPTIONAL FLIP



REAR VIEW

THIS DRAWING AND THE INFORMATION IT CONTAINS IS THE PROPERTY OF FONTAINE TRAILERS. THIS DRAWING IS LOANED TO YOUR OFFICE OR COMPANY. IT WILL NOT BE REPRODUCED OR COPIED IN ANY MANNER. THAT IT WILL BE RETURNED TO THE OWNER IMMEDIATELY UPON REQUEST AND THAT THE INFORMATION IT CONTAINS WILL BE USED SOLELY IN CONNECTION WITH WORK BEING PERFORMED FOR OR SPECIFICALLY AUTHORIZED IN WRITING BY FONTAINE TRAILERS.

	FONTAINE HEAVY-HAUL	DRAWING NUMBER
	SPRINGVILLE, AL	6393
	WORKHORSE 55LCC FLD	26 54